

# IPv6 Transition Strategies



Philip Smith

<philip@apnic.net>

MyNOG 3

25<sup>th</sup> – 29<sup>th</sup> November 2013

Kuala Lumpur

# Presentation Slides

---


- Will be available on
  - <http://thyme.apnic.net/ftp/seminars-MyNOG3-IPv6-Transition.pdf>
  - And on the MyNOG 3 website
- Feel free to ask questions any time

# Introduction




Why should we care?

# “The times, They are a’ changin’”

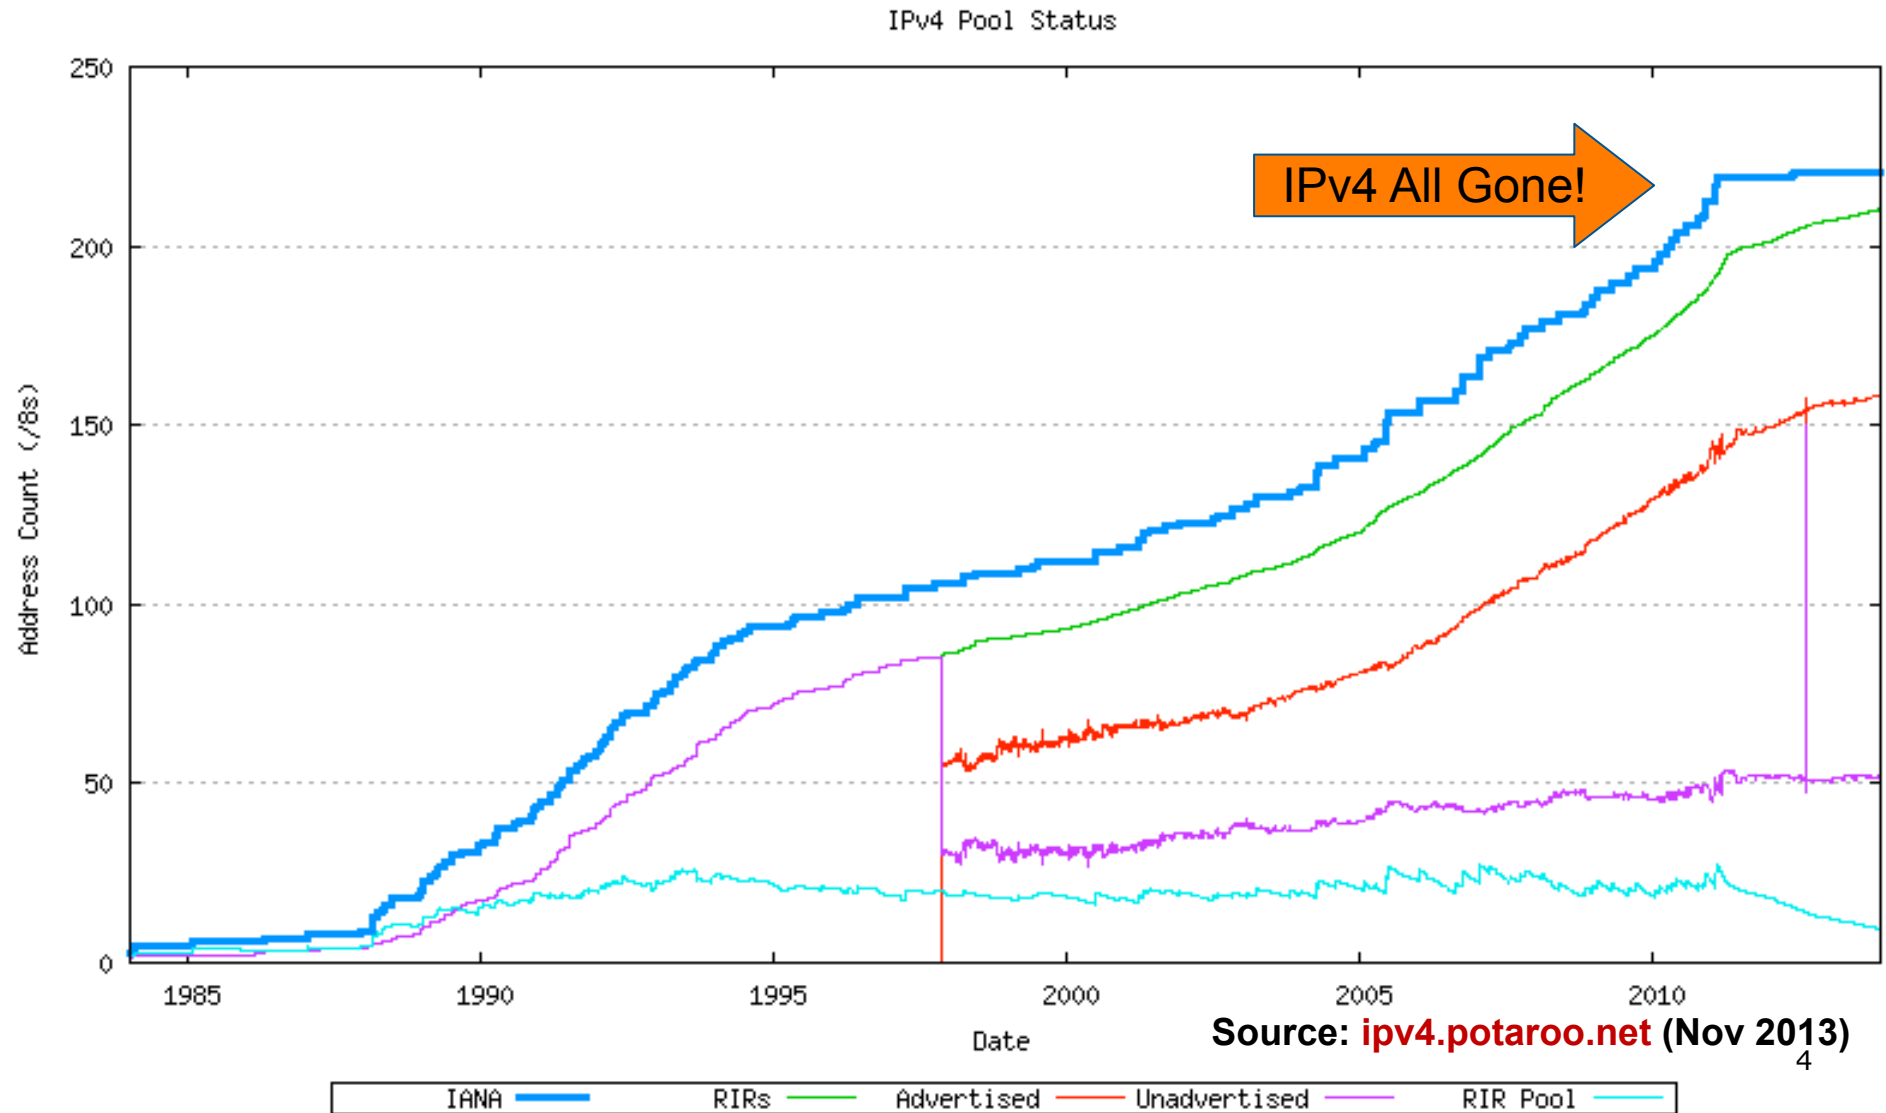

# Is IPv4 really running out?

- Yes!
  - IANA IPv4 free pool ran out on 3rd February 2011
  - RIR IPv4 free pool will run out soon after
  - [www.potaroo.net/tools/ipv4/](http://www.potaroo.net/tools/ipv4/)
    - (depends on RIR soft-landing policies)
- The runout gadgets and widgets are now watching when the RIR pools will run out:
  - [inetcore.com/project/ipv4ec/index\\_en.html](http://inetcore.com/project/ipv4ec/index_en.html)
  - [ipv6.he.net/statistics/](http://ipv6.he.net/statistics/)

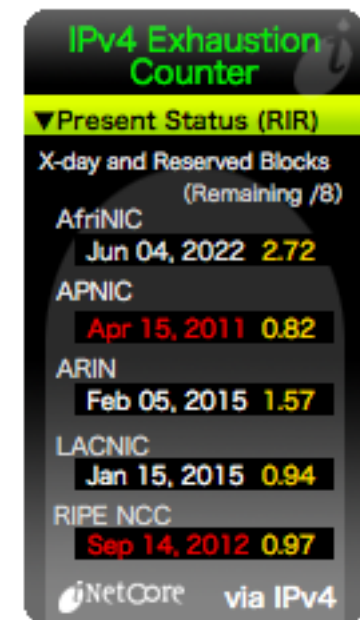

# Strategies available for Service Providers

---

- ❑ Do nothing
  - Wait and see what competitors do
  - Business not growing, so don't care what happens
- ❑ Extend life of IPv4
  - Force customers to NAT
  - Buy IPv4 address space on the marketplace
- ❑ Deploy IPv6
  - Dual-stack infrastructure
  - IPv6 and NATed IPv4 for customers
  - 6rd (Rapid Deploy) with native or NATed IPv4 for customers
  - 464XLAT with native IPv6 and NATed IPv4 for customers
  - Or other combinations of IPv6, IPv4 and NAT

# Definition of Terms



# Dual-Stack Networks

---

- ❑ Both IPv4 and IPv6 have been fully deployed across all the infrastructure
  - Routing protocols handle IPv4 and IPv6
  - Content, application, and services available on IPv4 and IPv6
- ❑ End-users use dual-stack network transparently:
  - If DNS returns IPv6 address for domain name query, IPv6 transport is used
  - If no IPv6 address returned, DNS is queried for IPv4 address, and IPv4 transport is used instead
- ❑ It is envisaged that the Internet will operate dual-stack for many years to come

# IP in IP Tunnels

---

- ❑ A mechanism whereby an IP packet from one address family is encapsulated in an IP packet from another address family
  - Enables the original packet to be transported over network of another address family
- ❑ Allows ISP to provide dual-stack service prior to completing infrastructure deployment
- ❑ Tunnelling techniques include:
  - IPinIP, GRE, 6to4, Teredo, ISATAP, 6rd, MPLS

# Address Family Translation (AFT)

---

- ❑ Refers to translation of an IP address from one address family into another address family
  - e.g. IPv6 to IPv4 translation
    - ❑ Usually called NAT64
  - Or IPv4 to IPv6 translation
    - ❑ Usually called NAT46, usually using SIIT

# Network Address Translation (NAT)

---

- ❑ NAT is translation of one IP address into another IP address
- ❑ NAT (Network Address & Port Translation) translates multiple IP addresses into one other IP address
  - TCP/UDP port distinguishes different packet flows
- ❑ NAT-PT (NAT – Protocol Translation) is a particular technology which does protocol translation in addition to address translation
  - NAT-PT is has now been made obsolete by the IETF

# Carrier Grade NAT (CGN)

---

- ❑ ISP version of subscriber NAT
  - Subscriber NAT can handle only hundreds of translations
  - ISP NAT can handle millions of translations
- ❑ Not limited to just translation within one address family, but does address family translation as well
- ❑ Often referred to as Large Scale NAT (LSN)

# NAT Issues

---


- ❑ Breaks the end-to-end model of IP
- ❑ Breaks end-to-end network security
- ❑ Serious consequences for Lawful Intercept
- ❑ Non-NAT friendly applications means NAT has to be upgraded
- ❑ Some applications don't work through NATs
- ❑ Layered NAT devices
- ❑ Mandates that the network keeps the state of the connections
- ❑ How to scale NAT performance for large networks??
- ❑ Makes fast rerouting and multihoming difficult
- ❑ How to offer content from behind a NAT?

# Strategy One



Do Nothing

# IPv4 only Network

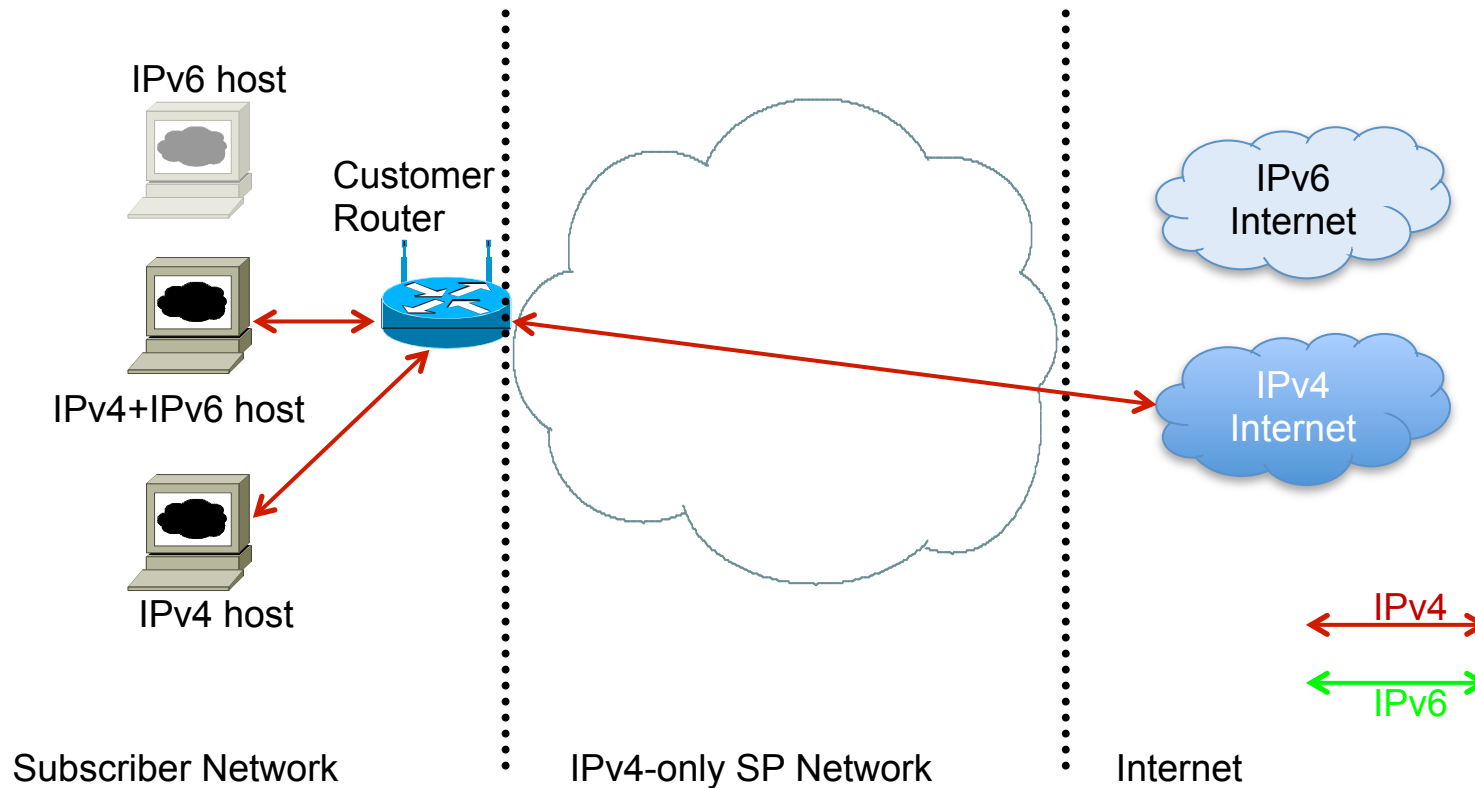

- The situation for many SPs today:
  - No IPv6 for consumer
  - IPv4 scaling lasts as long as IPv4 addresses are available

# IPv4 only: Issues

---

## □ Advantages

- Easiest and most cost effective short term strategy

## □ Disadvantages

- Limited to IPv4 address availability (RIRs or marketplace)
- No access to IPv6
- Negative public perception of SP as a laggard
- Strategy will have to be reconsidered once IPv4 address space is no longer available

# IPv4 only: Applicability

---

- For Network Operators who:
  - Have sufficient IPv4 address space for foreseeable future business needs
  - Don't undertake long term planning
  - Are not heeding customer requests regarding IPv6 access
  - Have sufficient funds to purchase IPv4 address space via the marketplace

# Strategy Two




Extend life of IPv4 network

# Extending life of IPv4 Network

---

- ❑ Two ways of extending IPv4 network
  - Next step along from “Strategy One: Do nothing”
- ❑ Force customers to use NAT
  - Customers moved to RFC1918 address space
  - SP infrastructure moved to RFC6598 address space (or use RFC1918 where feasible)
- ❑ Acquire IPv4 address space from another organisation
  - IPv4 subnet trading

# SP NAT in IPv4-only network

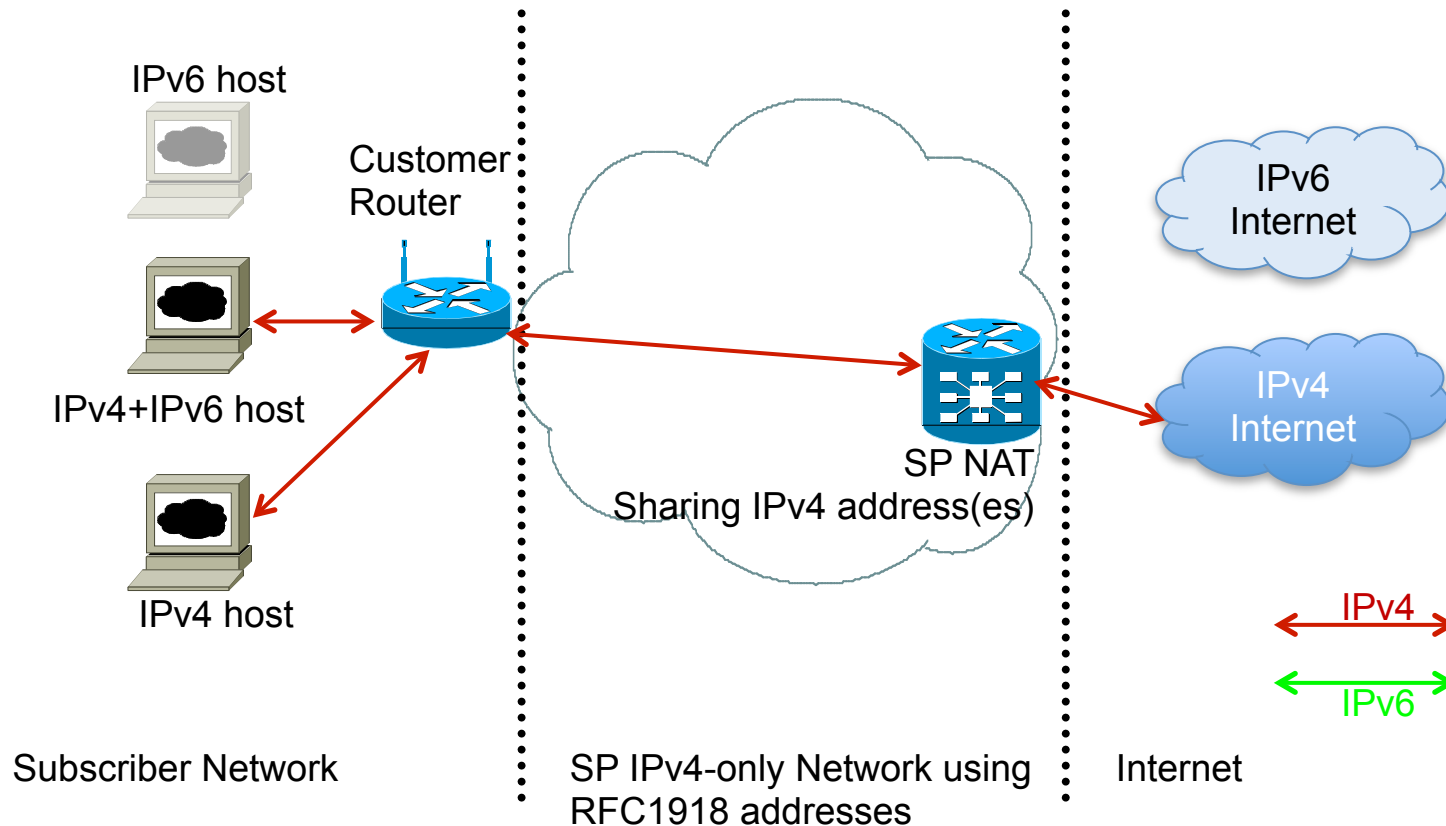

- Next step on from "doing nothing":
  - SP introduces NAT in core when IPv4 addresses run out
  - No access to IPv6 Internet for IPv6 enabled hosts

# SP NAT in IPv4-only network:

## Issues

---

### □ Advantages

- ISPs can reclaim global IPv4 addresses from their customers, replacing with non-routable private addresses and NAT
- Allows continued IPv4 subscriber growth

### □ Disadvantages

- SP needs a large NAT device in the aggregation or core layers
- Has every well known technical drawback of NAT, including prevention of service deployment by customers
- Double NAT highly likely (customer NAT as well as SP NAT)
- Sharing IPv4 addresses could have behavioural, security and liability implications
- Tracking association of port/address and subscriber, not to mention Lawful Intercept issues, are still under study
- May postpone IPv6 deployment for a couple of years
- Prevents subscribers from using IPv6 content, services and applications

# SP NAT in IPv4-only network:

## Applicability

---

- For Network Operators who:
  - Are content to purchase and operate CGN devices within their core network
  - Are aware of the operational and performance pitfalls of CGN devices
  - Are able to reclaim public addresses from their customers for redeployment in their backbone
  - Are not heeding requests from customers for IPv6 access

# IPv4 Subnet Trading

---

- ❑ Today the cost of getting IPv4 address space is low:
  - Service Provider:
    - ❑ RIR membership fee
    - ❑ Registration service fee (varies according to RIR service region)
  - End-sites usually receive IPv4 address block from SP as part of service
  - Many SPs already charge end-site for privilege of public IPv4 address
- ❑ In future when RIRs have no more IPv4 address space to distribute:
  - Cost of IPv4 addresses will be higher (today it's close to 0)
  - SPs may “purchase” IPv4 address space from other organisations

# IPv4 Subnet Trading: Issues

---

## □ Advantages

- Valuation of IPv4 addresses may hasten IPv6 adoption by encouraging sellers, perhaps more than offsetting costs to move some or all of their network to v6
- Receivers of transferred IPv4 address space can prolong their IPv4 networks

## □ Disadvantages

- Market may not materialise, so organisations hoping to benefit may not
- Depending on region, if RIR doesn't register transfer, there may be no routability
- Risk to integrity of routing system, as RIRs no longer authoritative for address records
- Even more rapid growth of routing system
- Financial pressure on ISPs to dispose of IPv4 addresses they still need

# IPv4 Subnet Trading: Applicability

---

- ❑ For Network Operators who:
  - Are have sufficient funds to purchase IPv4 address space on the marketplace
  - Are aware of the operational and performance pitfalls of purchased address space
    - ❑ Routability (legacy SP filters)
    - ❑ Registration (RIR vs not)
    - ❑ Reputation (previous user)
  - Are not heeding requests from customers for IPv6 access

# Strategy Three



IPv4/v6 Coexistence/Transition  
techniques

# IPv4/IPv6 coexistence & transition

---


- Three strategies for IPv6 transition:
  - Dual Stack Network
    - The original strategy
    - Depends on sufficient IPv4 being available
  - 6rd (Rapid Deploy)
    - Improvement on 6to4 for SP customer deployment
    - Activity of IETF **Softwires** Working Group
  - Large Scale NAT (LSN)
    - SP deploys large NAT boxes to do address and/or protocol translation

# IPv4/IPv6 coexistence & transition

---

- Large Scale NAT (LSN)
  - NAT444/SP NAT
    - NAT to customer, optionally NAT'ed core.
  - Dual-Stack Lite & 464XLAT
    - IPv4 to IPv4 over IPv6
    - Activity of IETF **Softwires** & **v6ops** Working Groups
  - NAT64
    - Translation between IPv6 and IPv4
    - Activity of IETF **Behave** Working Group

# Dual-Stack Network

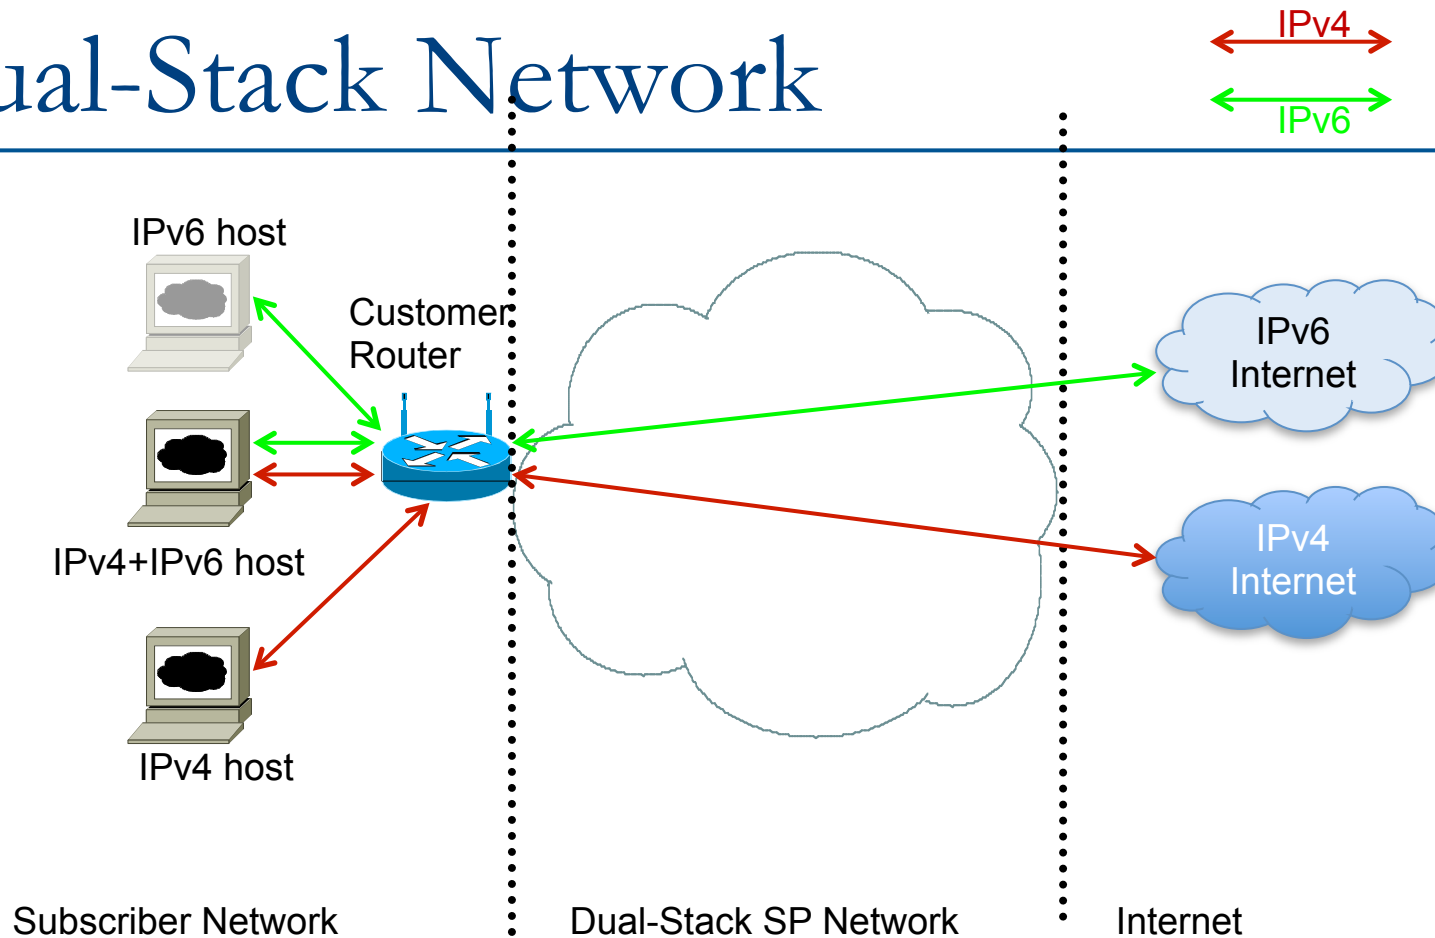

- The original transition scenario, but dependent on:
  - IPv6 being available all the way to the consumer
  - Sufficient IPv4 address space for the consumer and SP core

# Dual-Stack Network: Issues

---

## □ Advantages

- Most cost effective long term model
- Once services are on IPv6, IPv4 can simply be discontinued

## □ Disadvantages


- IPv4 growth limited to available IPv4 address space
- Running dual-stack network requires extra staff training
- IPv6 on existing IPv4 infrastructure might cost extra in terms of hardware changes (RIB and FIB memories)
- IPv6-only end-points cannot access IPv4, but given most IPv6 end-points are dual-stack, require IPv4 address too

# Dual-Stack Network: Applicability

---

- ❑ For Network Operators who:
  - Have sufficient IPv4 address space for foreseeable future
  - Also may consider purchasing IPv4 address space on the open market
  - Have no legacy equipment or infrastructure which does not support IPv6
  - Do not wish to deploy CGN (NAT44)
  - **Are willing to support dual-stack CPE**
- ❑ Note: this is considered the ideal option
- ❑ Example:
  - Typical traditional Internet Service Provider deployment

# Dual-Stack with SP NAT

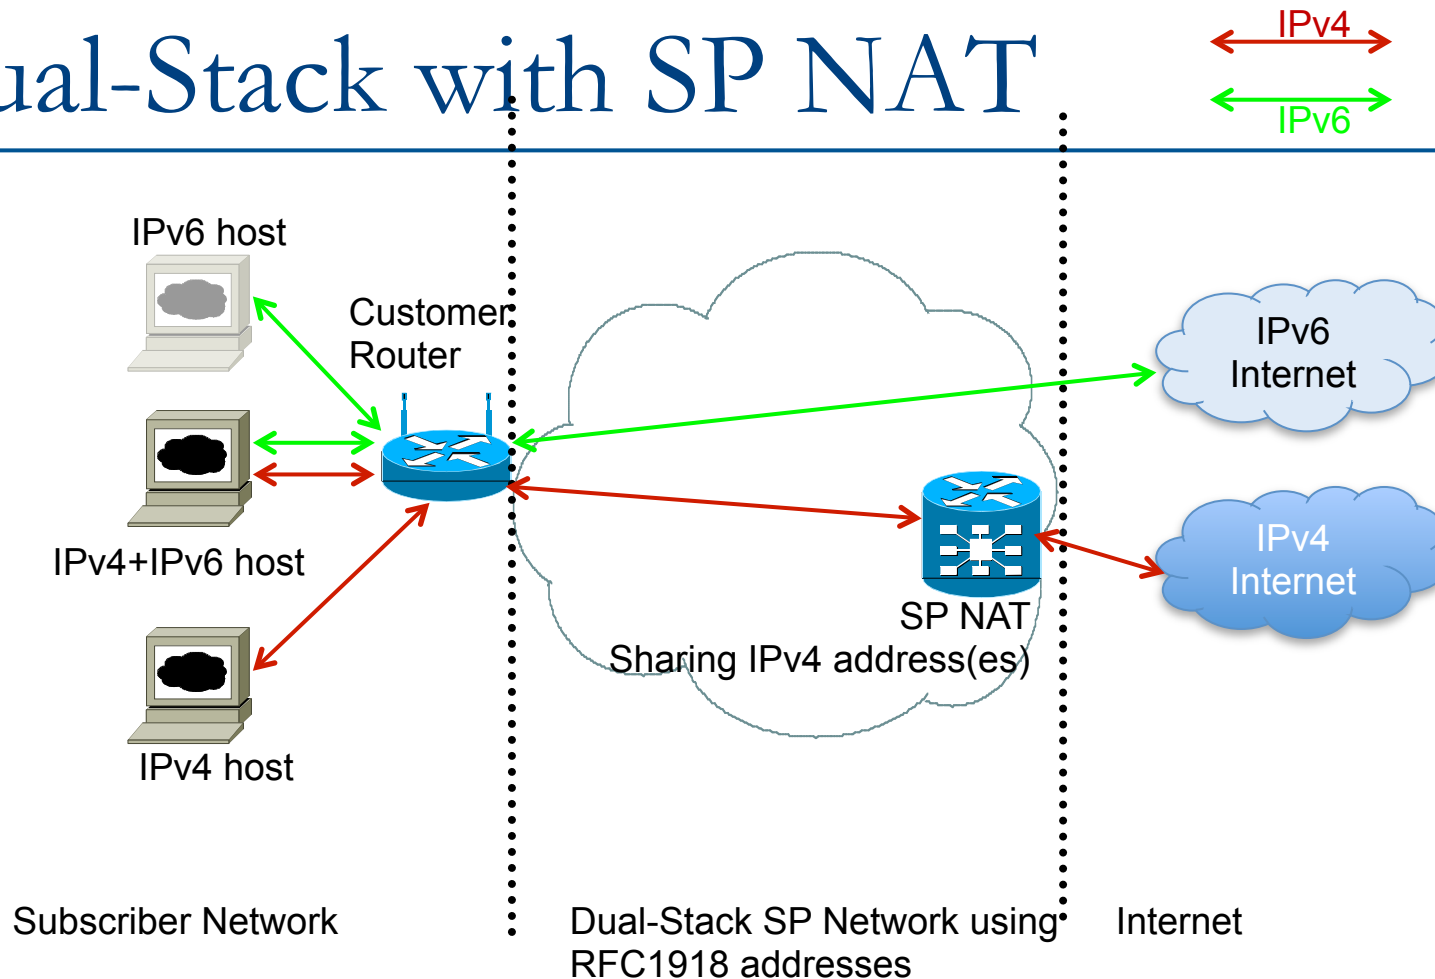

- More likely scenario:
  - IPv6 being available all the way to the consumer
  - SP core and customer has to use IPv4 NAT due to v4 depletion

# Dual-Stack with SP NAT: Issues

---

## □ Advantages

- ISPs can reclaim global IPv4 addresses from their customers, replacing with non-routable private addresses and NAT
- Allows continued IPv4 subscriber growth
- SP can offer IPv6 connectivity too
- Does not postpone IPv6 deployment

## □ Disadvantages


- SP needs a large NAT device in the aggregation or core layers
- Has every well known technical drawback of NAT, including prevention of service deployment by customers
- Double NAT highly likely (customer NAT as well as SP NAT)
- Sharing IPv4 addresses could have behavioural, security and liability implications
- Tracking association of port/address and subscriber, not to mention Lawful Intercept issues, are still under study
- SP incurs additional investment and operational expenditure by deploying an IPv6 infrastructure

# Dual-Stack with SP-NAT: Applicability

---

- ❑ For Network Operators who:
  - Have do not sufficient IPv4 address space and are content deploying CGN (NAT44) in the core
  - Are able to reclaim public IPv4 address space from customers for redeployment on their backbone infrastructure
  - Have no legacy equipment or infrastructure which does not support IPv6
  - **Are willing to support dual-stack CPE**
- ❑ Note: this is considered the realistic best practice
- ❑ Example:
  - Typical traditional Internet Service Provider deployment

# 6rd

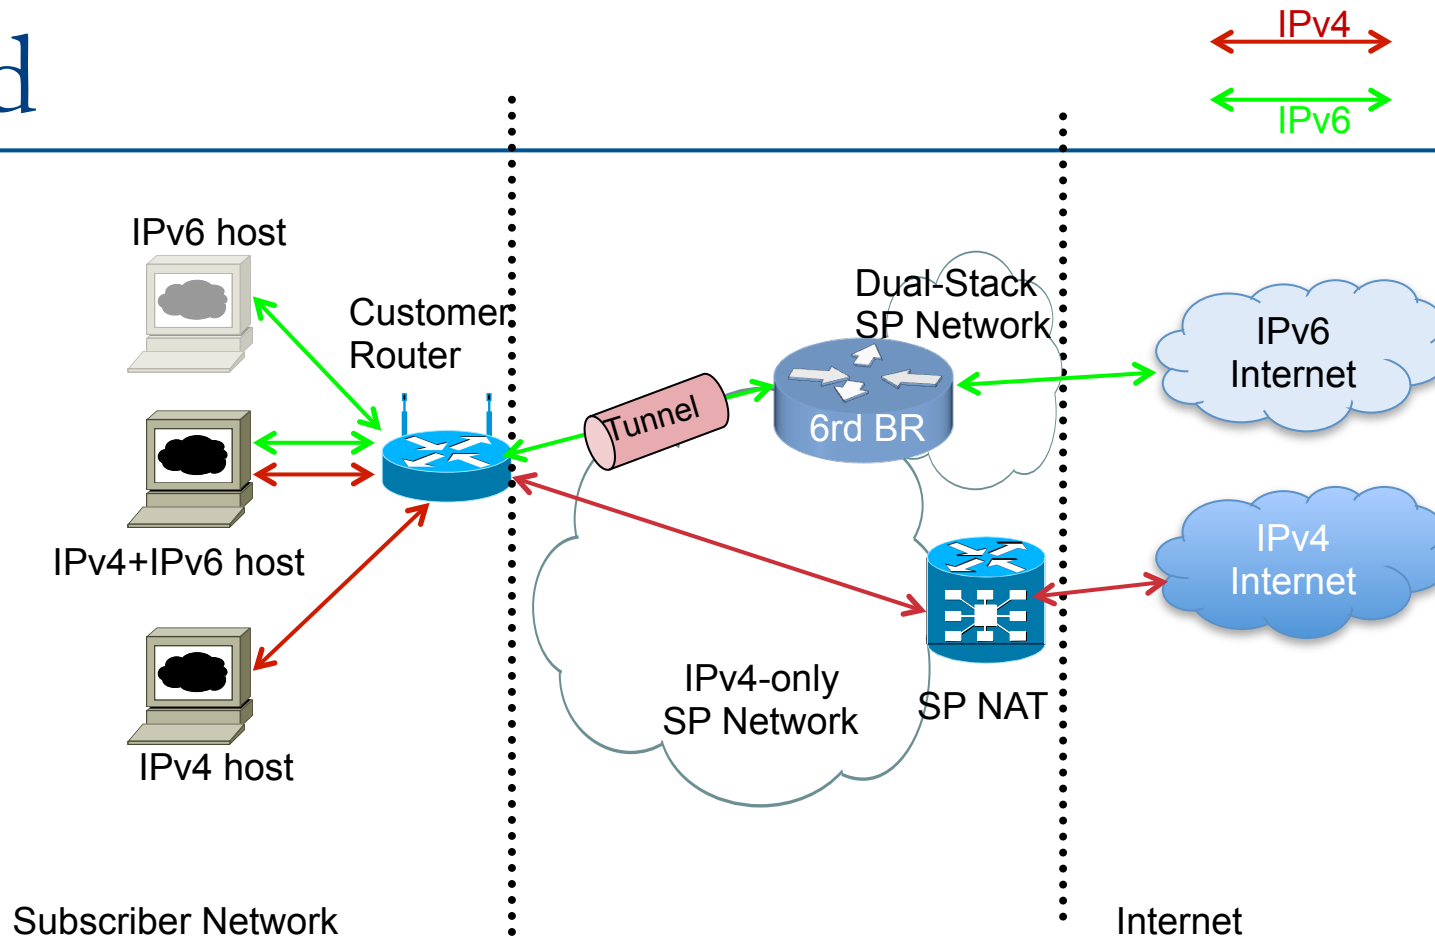

- ❑ 6rd (Rapid Deploy) used where ISP infrastructure to customer is not IPv6 capable (eg IPv4-only BRAS)
  - Customer has IPv4 Internet access either natively or via NAT
  - Customer IPv6 address space based on ISP IPv4 block

# 6rd: Issues

---

## □ Advantages

- The service provider has a relatively quick way of providing IPv6 to their customer without deploying IPv6 across their infrastructure
- Subscribers can readily get access to IPv6
- 6rd relay and CPE are becoming available from vendors
- 6rd operation is completely stateless, does not have the operational drawbacks of 6to4, and does not postpone IPv6 deployment

## □ Disadvantages

- 6rd is not a long-term solution for transitioning to IPv6 – one further transition step to remove the tunnels
- CPE needs to be upgraded to support 6rd
- The ISP has to deploy one or several 6rd termination devices
- If customer or SP uses NAT for IPv4, all NAT disadvantages are inherited

# 6rd: Applicability

---


## □ For Network Operators who:

- Have do not sufficient IPv4 address space and are content deploying CGN (NAT44) in the core
- Are able to reclaim public IPv4 address space from customers for redeployment on their backbone infrastructure
- Have legacy equipment or infrastructure which does not support IPv6
  - And realise that it will eventually have to be upgraded
- Are willing to run a 6rd Border Router
- Are willing to support dual-stack CPE (with 6rd)

## □ Example:

- Broadband operators who have legacy DSLAMs or lease a third party's L2 network

# Dual-Stack Lite

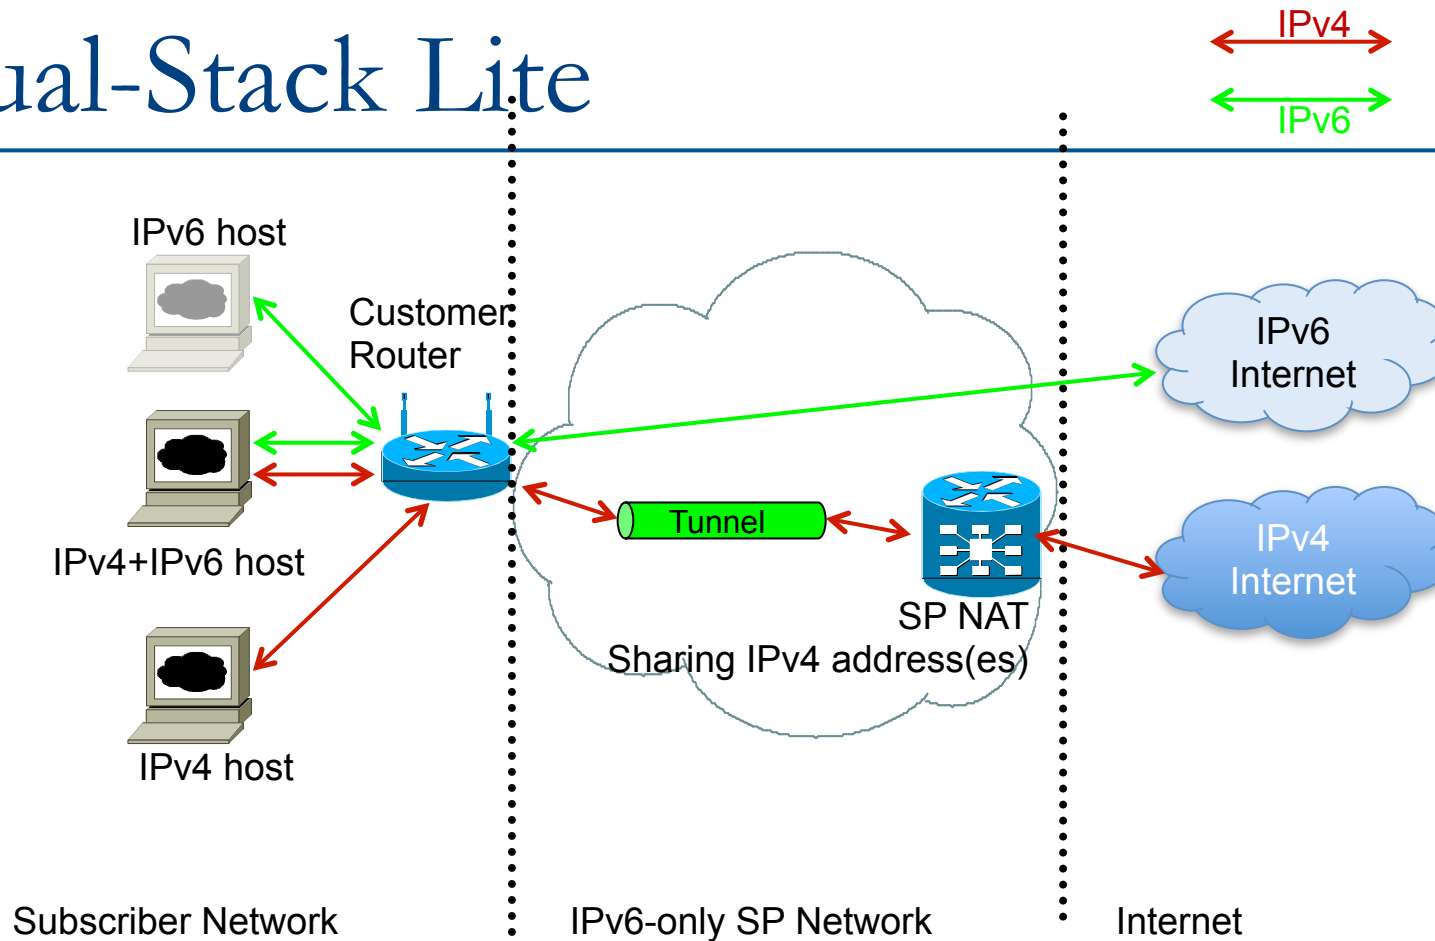

- Service Provider deploys IPv6-only infrastructure:
  - IPv6 being available all the way to the consumer
  - IPv4 is tunnelled through IPv6 core to Internet via SP NAT device

# Dual-Stack Lite: Issues

---

## □ Advantages

- The SP is using IPv6 across their entire infrastructure, avoiding the IPv4 address pool depletion issue totally
- The SP can scale their infrastructure without any IPv4 dependencies
- Consumers can transition from IPv4 to IPv6 without being aware of any differences in the protocols
- IPv6 packets routed natively

## □ Disadvantages


- SP requires NAT device in core supporting DS-Lite
- Subscriber router needs to be IPv6 capable
- Model has all drawbacks of SP NAT model for IPv4 traffic

# Dual-Stack Lite: Applicability

---

- For Network Operators who:
  - Are considering “green-field” deployments
  - Are content running an IPv6-only backbone
  - Are willing to deploy CGN (DS-Lite) in the core
  - Are willing to support dual-stack CPE (with DS-Lite)
- Example:
  - Mobile operators rolling out a brand new network, with handsets which have dual-stack radios

# 464XLAT

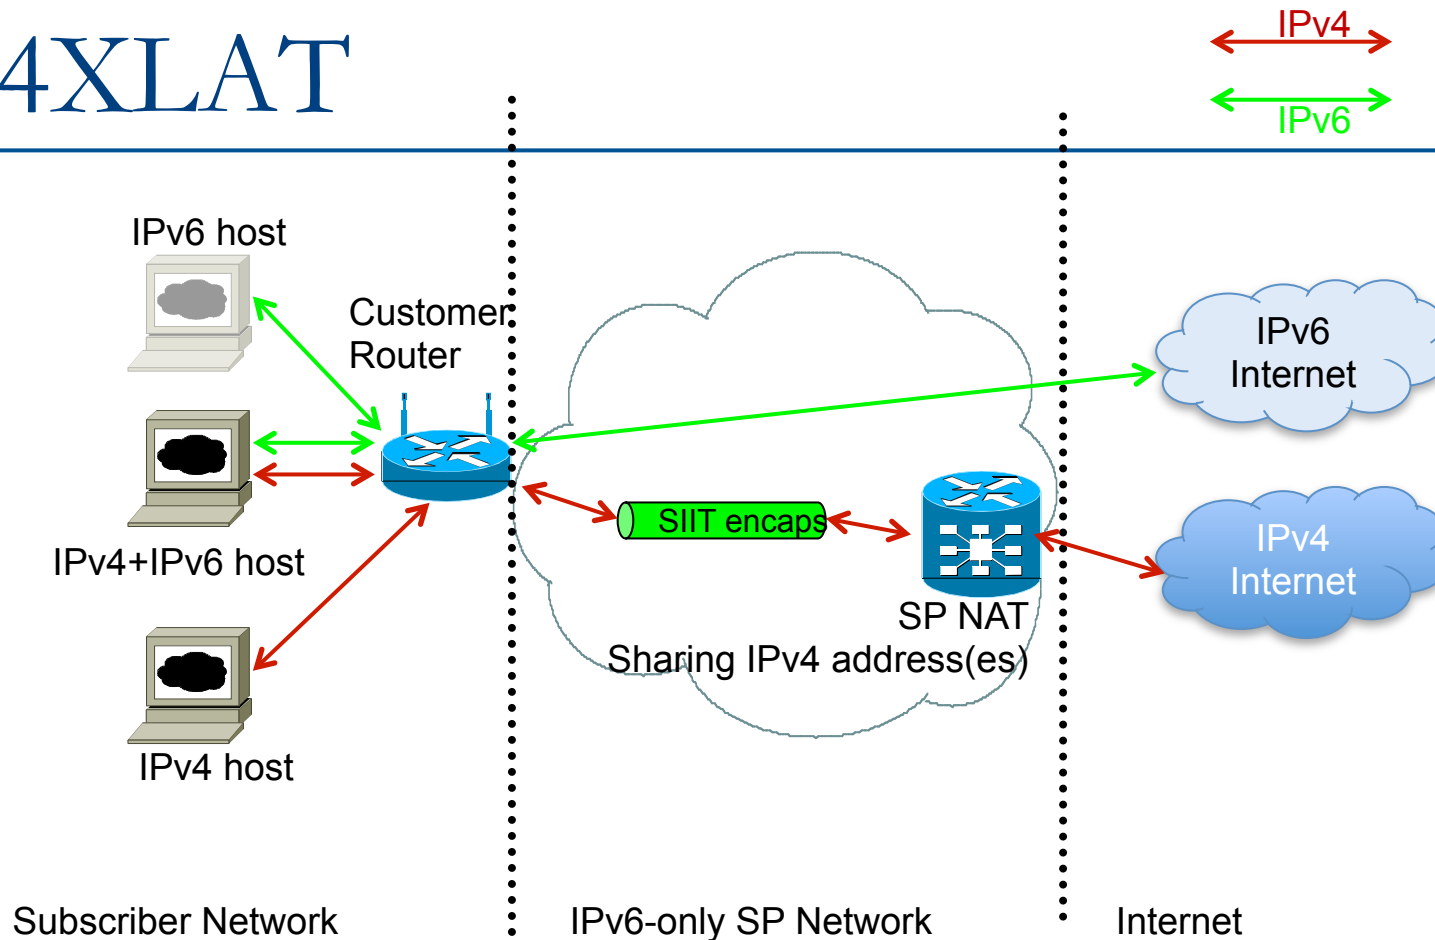

- Service Provider deploys IPv6-only infrastructure:
  - IPv6 being available all the way to the consumer
  - IPv4 is transported through IPv6 core to Internet via SIIT on customer router, and NAT64 on SP NAT device

# 464XLAT: Issues

---

## □ Advantages

- The SP is using IPv6 across their entire infrastructure, avoiding the IPv4 address pool depletion issue totally
- The SP can scale their infrastructure without any IPv4 dependencies
- Consumers can transition from IPv4 to IPv6 without being aware of any differences in the protocols
- Devices not supporting IPv6 can access IPv6-only networks
- IPv6 packets routed natively

## □ Disadvantages


- SP requires NAT device in core (PLAT – NAT64)
- Subscriber router needs to be IPv6 capable and support IPv4/IPv6 header translation (CLAT – SIIT)
- Model has all drawbacks of SP NAT model for IPv4 traffic<sup>42</sup>

# 464XLAT: Applicability

---


- For Network Operators who:
  - Are considering “green-field” deployments
  - Are content running an IPv6-only backbone
  - Are willing to deploy CGN (PLAT) in the core
  - Are willing to support dual-stack CPE (with SIIT)
- Example:
  - Mobile operators rolling out a brand new network, with handsets which have dual-stack radios

# Stateful AFT (NAT64)

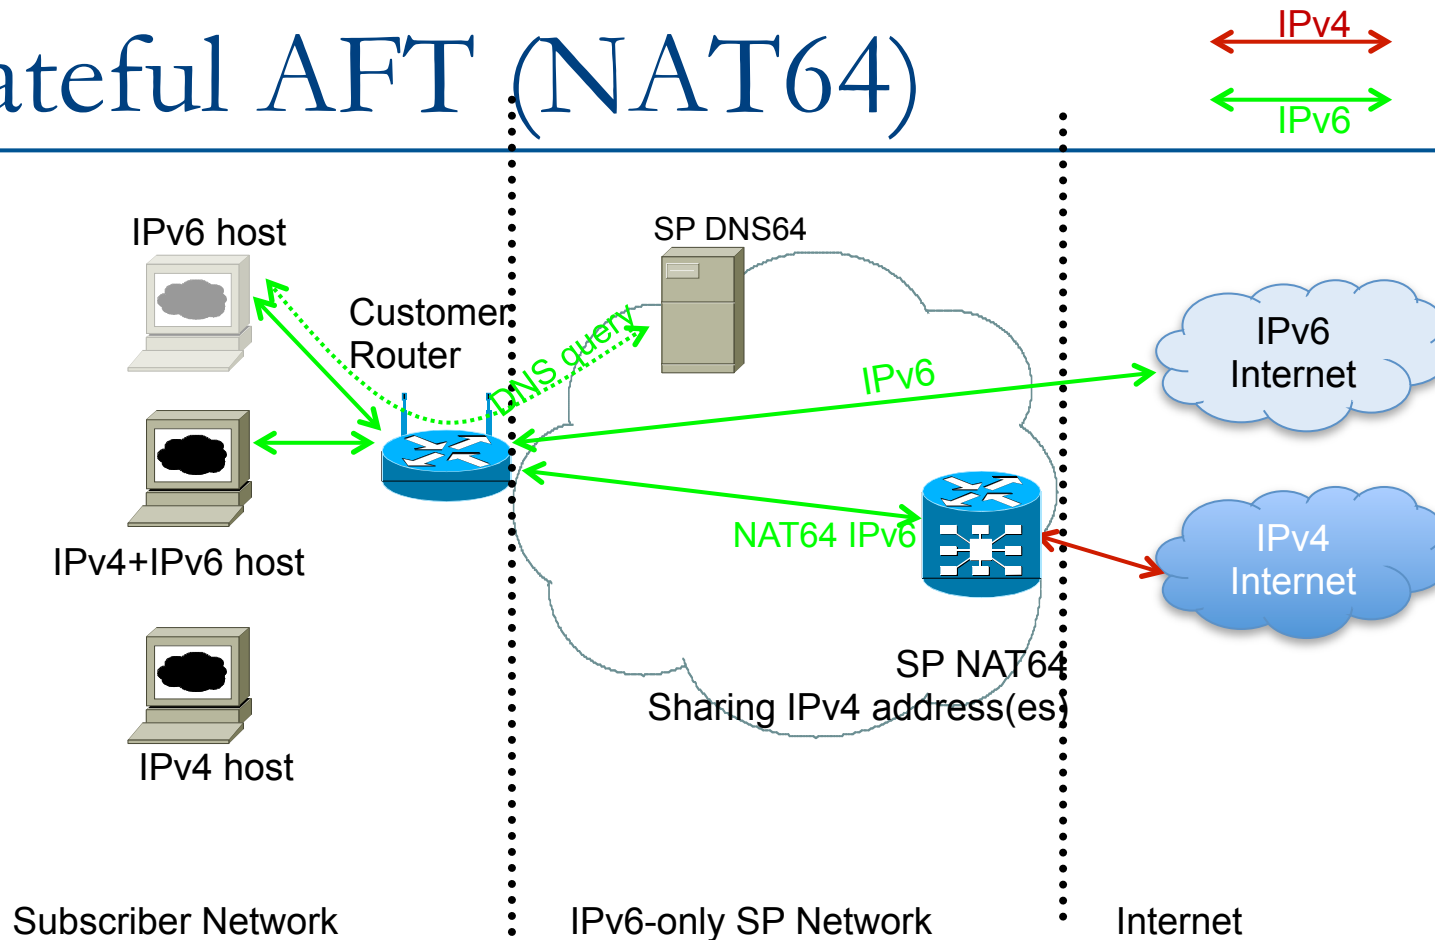

- Service Provider deploys IPv6-only infrastructure:
  - Only IPv6 is available to the consumer
  - IPv4 Internet available via Address Family Translation on SP NAT device

# Stateful AFT (NAT64) Details

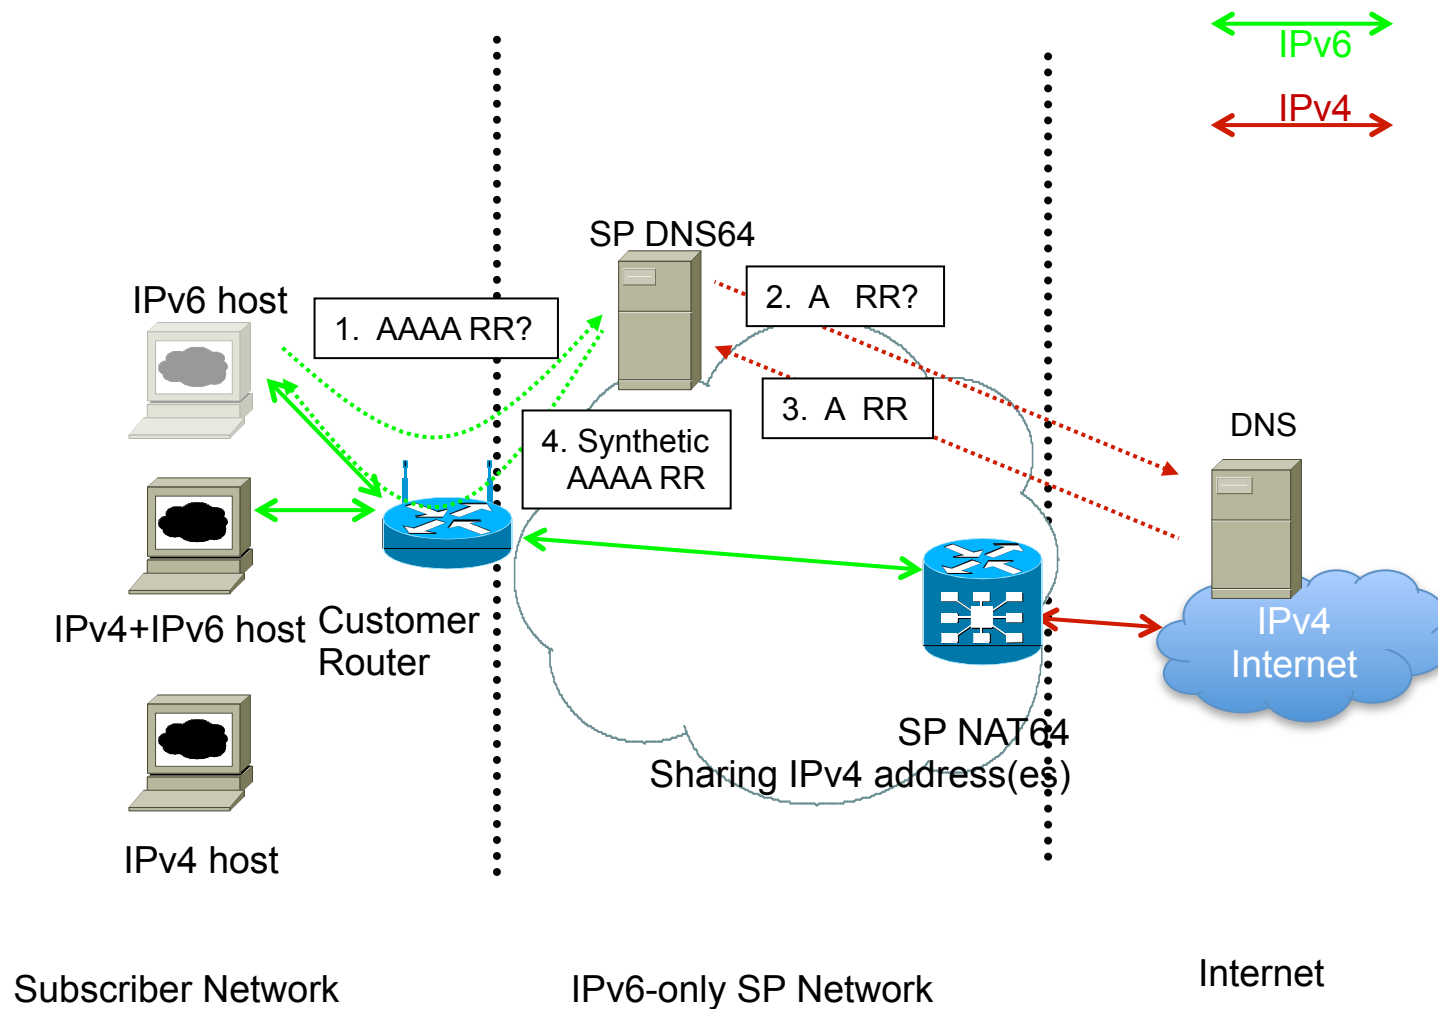

# Stateful AFT: Issues

---

## □ Advantages

- Allows IPv6 only consumers access to IPv4 based content without giving them IPv4 address resources
- IPv6 services and applications offered natively to consumers
- SP network runs IPv6 only, avoiding IPv4 dependencies

## □ Disadvantages

- SP requires NAT device in core
- SP's DNS infrastructure needs to be modified to support NAT64
- Subscriber router needs to be IPv6 capable
- Subscriber devices need to be IPv6 capable (no legacy support)
- Model has all drawbacks of SP NAT model for IPv4 traffic

# Stateful AFT: Applicability

---

- For Network Operators who:
  - Are considering “green-field” deployments
  - Are content running an IPv6-only backbone
  - Are willing to deploy CGN (NAT64) in the core
  - Are willing to support IPv6-only CPE
- Example:
  - Mobile operators rolling out a brand new network, with handsets which have single-stack (IPv6-only) radios

# Conclusions



# Summary (1)

---

- ❑ Have covered the transition techniques which network operators are deploying today
- ❑ Not covered:
  - Tunnels (GRE, 6in4, MPLS)
  - 6to4 – operational reliability & security issues
  - IVI – limited availability
  - Teredo – security issues
  - ISATAP – security issues
  - LISP – limited availability
  - A+P – limited availability
  - MAP-E/T – proprietary

## Summary (2)

---

- Functional and Operational Issues
  - How should a Network Operator choose what to do?
- Potential Scenarios
  - How will a Network Operator continue growing their operations?
- Recommendations
  - What should a Network Operator do?

# Functionalities and Operational Issues

---

- ❑ Complexity of operation:
  - Moderate in the case of a single network with two address families
- ❑ Complexity of troubleshooting:
  - Running two address families and/or tunnels is assumed to be more complex
- ❑ Breaks end-to-end connectivity in IPv4:
  - Subscribers sharing a CGN will have little to no hurdles in their communication
  - Subscribers separated by one or several CGN will experience some application issues

# Conclusions

## Potential Scenarios

---

- ❑ Most of the content and applications move to IPv6 only;
- ❑ Most of the content and applications are offered for IPv4 and IPv6;
- ❑ Most of the users move to IPv6 only
  - Especially mobile operators offering LTE handsets in emerging countries
- ❑ No change (the contents/applications stay IPv4 and absence of pro-IPv6 regulation), SP customer expectations devolve to double-NAT;
- ❑ No change (the contents/applications stay IPv4) but SP customer expectations do not devolve to double-NAT (or they are ready to pay for peer-to-peer connectivity).
  - Perhaps well established broadband markets like US or Europe

# Recommendations

---

1. Start deploying IPv6 as long term strategy
2. Evaluate current addressing usage to understand if IPv4 to IPv4 NAT is sufficient for transition period
3. Prepare a translation mechanism from the IPv4 Internet to the IPv6 Internet
4. Educate your user base on IPv6 introduction, the use cases and troubleshooting