

# IS-IS for IPv6

## ISP Workshops



These materials are licensed under the Creative Commons Attribution-NonCommercial 4.0 International license (<http://creativecommons.org/licenses/by-nc/4.0/>)

# Acknowledgements

---

- This material originated from the Cisco ISP/IXP Workshop Programme developed by Philip Smith & Barry Greene
- Use of these materials is encouraged as long as the source is fully acknowledged and this notice remains in place
- Bug fixes and improvements are welcomed
  - Please email *workshop (at) bgp4all.com*

Philip Smith



# Topics Covered

---

- IS-IS standardisation
- IS-IS for IPv6
- Multi-Topology IS-IS

# IS-IS Standards History

---

- ISO 10589 specifies the OSI IS-IS routing protocol for CLNS traffic
- RFC 1195 added IPv4 support
  - Also known as Integrated IS-IS (I/IS-IS)
  - I/IS-IS runs on top of the Data Link Layer
- RFC5308 adds IPv6 address family support
- RFC5120 defines Multi-Topology concept
  - Permits IPv4 and IPv6 topologies which are not identical
  - **Permits roll out of IPv6 without impacting IPv4 operations**

# Integrated IS-IS for IPv6 Overview

---

- 2 Type/Length/Values (TLV) added to support IPv6 routing
- IPv6 Reachability TLV (0xEC)
  - Describes network reachability such as IPv6 routing prefix, metric information and some option bits
- IPv6 Interface Address TLV (0xE8)
  - Contains a 128 bit address
  - For Hello PDUs, must contain the link-local address (FE80::/10)
  - For LSP, must only contain the non link-local address

# Integrated IS-IS for IPv6 Overview

---

- A new Network Layer Protocol Identifier (NLPID) is defined
  - Allowing IS-IS routers with IPv6 support to advertise IPv6 prefix payload using 0x8E value
  - IPv4 and OSI uses different values

# IS-IS for IPv6



## IS-IS for IPv6

---

- A single SPF runs per level for OSI, IPv4 and IPv6
  - All routers in an area must run the same set of protocols [IPv4-only, IPv6-only, IPv4-IPv6]
  - L2 routers don't have to be configured similarly but no routing hole must exist



## Simple SPF rules

---

- If IS-IS is used for both IPv4 and IPv6 in an area, both protocols must support the same topology within this area:
  - “no adjacency-check” between L2 routers over-rides this, **but must be used with caution**
- All interfaces configured with IS-ISv6 must support IPv6
- All interfaces configured with IS-IS for both protocols must support both of them
  - IPv6 configured tunnel won't work, GRE should be used in this configuration
- Otherwise, consider Multi-Topology IS-IS (separate SPF)


# Single SPF IS-IS for IPv6 restrictions


---


- IS-IS for IPv6 uses the same SPF for both IPv4 and IPv6.
- Therefore:
  - Not suitable for an existing IPv4 IS-IS network where operator wants to turn on scattered IPv6 support
  - If using IS-IS for both IPv4 and IPv6 then the IPv4 and IPv6 topologies MUST match exactly. Cannot run IS-IS IPv6 on some interfaces, IS-IS IPv4 on others.
  - Will only form adjacencies with similarly-configured routers.
    - For example, an IS-IS IPv6-only router will not form an adjacency with an IS-IS IPv4/IPv6 router. (Exception is over L2-only interface)
  - Cannot join two IPv6 areas via an IPv4-only area. L2 adjacencies will form OK but IPv6 traffic will black-hole in the IPv4 area.

# IS-IS Hierarchy & IPv6 example

---

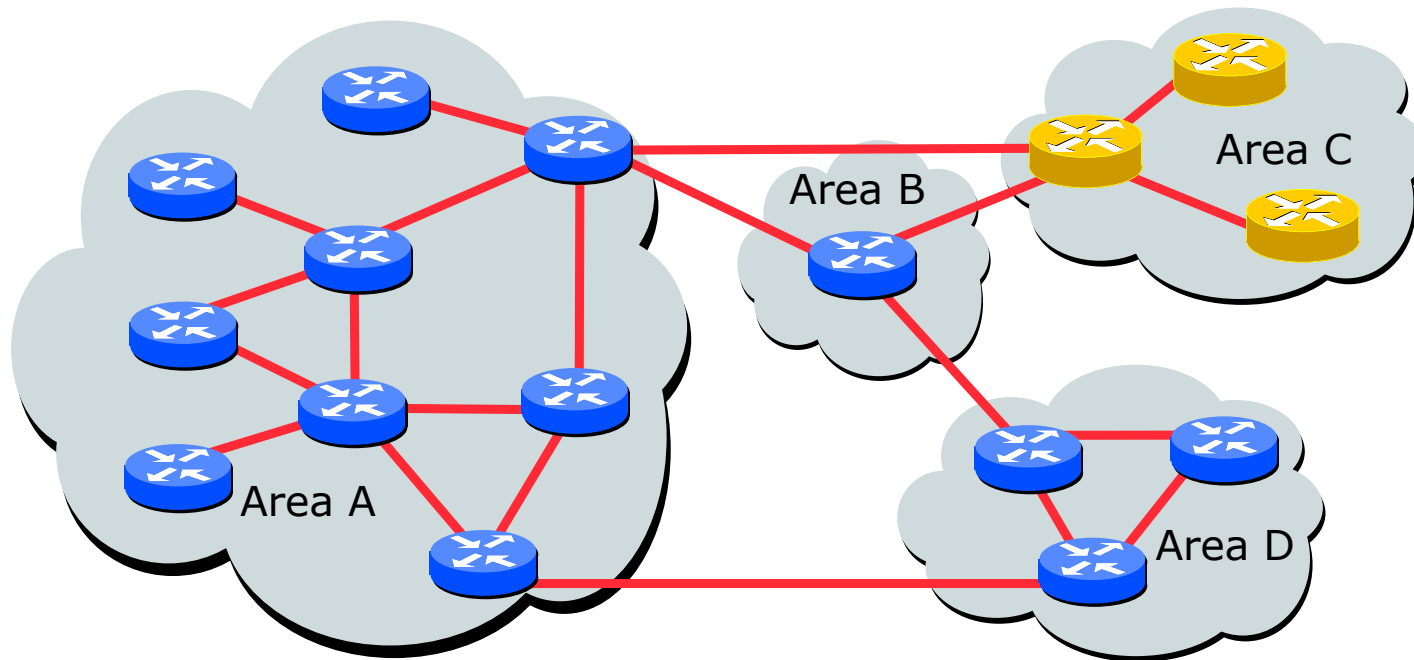

 IPv4-IPv6 enabled router

 IPv4-only enabled router

# Configuring IS-IS for IPv6

---

- ❑ CLI is familiar:
- ❑ IPv6 address family mode enables features specific to IPv6:

```
router isis as64512
  net 49.0001.0001.0001.00
  set-overload-bit on-startup wait-for-bgp
!
  address-family ipv6
    set-overload-bit on-startup wait-for-bgp
!
```

- ❑ Configure IS-IS for IPv6 on interfaces
  - Interface must be IPv6 enabled, eg. IPv6 address set

# IS-IS for IPv6

## Specific Attributes (1)

---

- Entering address-family sub-mode

```
[no] address-family ipv6
```

- IPv6 address-family sub-mode.

```
[no] adjacency-check
```

- Enables or disables adjacency IPv6 protocol-support checks. If checking is enabled (default condition when IS-IS IPv6 is configured) then the router will not form an adjacency with a neighbor not supporting IS-IS IPv6.

```
[no] distance <1-254>
```

- Sets the administrative distance of IS-IS IPv6. Note that the administrative distance is applied to routes in the IPv6 routing table only.

# IS-IS for IPv6

## Specific Attributes (2)

---

`[no] maximum-paths <1-4>`

- Sets the maximum number of paths allowed for a route learnt via IS-IS IPv6. Note that this applies to the IPv6 routing table only.

`[no] default-information originate [route-map <name>]`

- Configures origination of the IPv6 default route (::) by IS-IS. Used in the same manner as the existing IPv4 default-information command.

`[no] summary-prefix <prefix> [level-1|level-2|level-1-2]`

- Configures IPv6 summary prefixes. Command is used in same manner as the existing IPv4 summary-prefix command.

`[no] set-overload-bit on-startup wait-for-bgp`

- Set overload bit so that the router does not enter transit path until iBGP is running

# IS-IS for IPv6

## Specific Attributes (3)

---

```
[no] redistribute <protocol> [metric <value>] [metric-type {internal|external}]  
[level-1|level-1-2|level-2] [route-map <name>]
```

- Configures redistribution of routes learnt from other IPv6 sources into IS-IS. Command is used in same manner as existing IPv4 redistribute command.

```
[no] redistribute isis {level-1|level-2} into {level-1|level-2} distribute-list  
<prefix-list-name>
```

- Configures IS-IS inter-area redistribution of IPv6 routes. Command is used in same manner as existing IPv4 redistribute isis command.

- Leaving address-family sub-mode


```
exit-address-family
```

- Showing the I/IS-ISv6 configuration

```
show ipv6 protocols [summary]
```

# IS-IS for IPv6

## Configuration Example

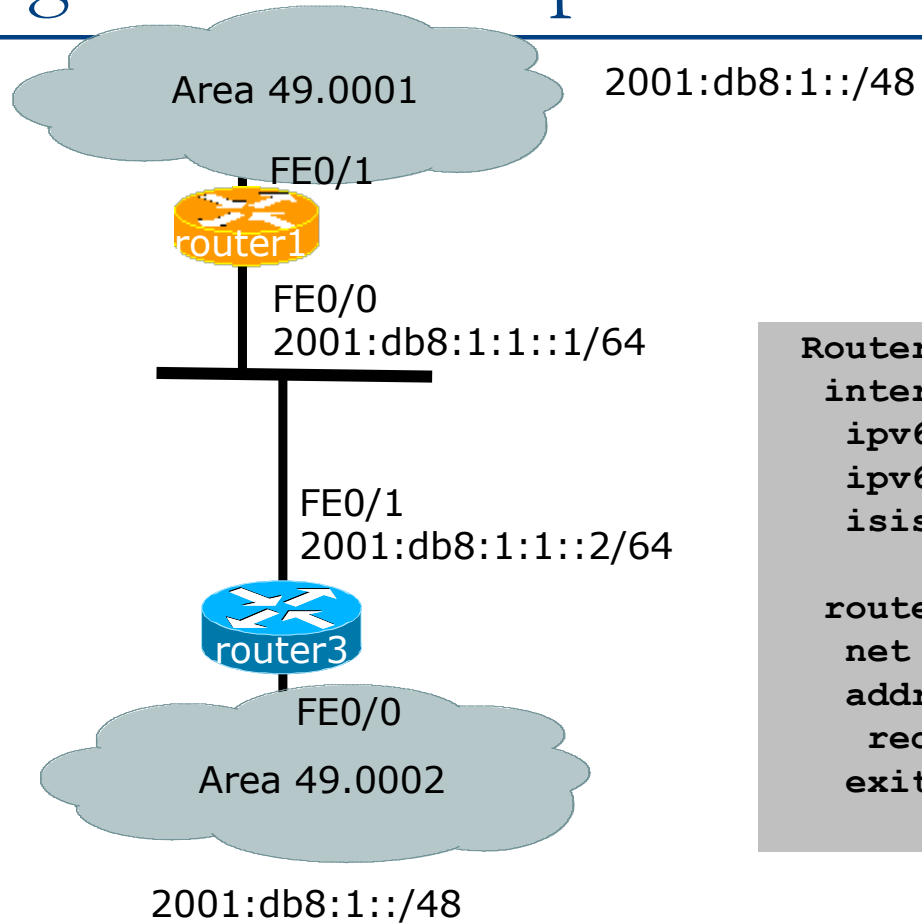


```
Router1#  
interface fastethernet0/0  
  ipv6 address 2001:db8:1:1::1/64  
  ipv6 router isis  
  isis circuit-type level-2-only  
  
router isis  
  net 49.0001.1921.6801.0001.00  
  address-family ipv6  
    redistribute static  
  exit-address-family
```



# IS-IS dual stack configuration

---

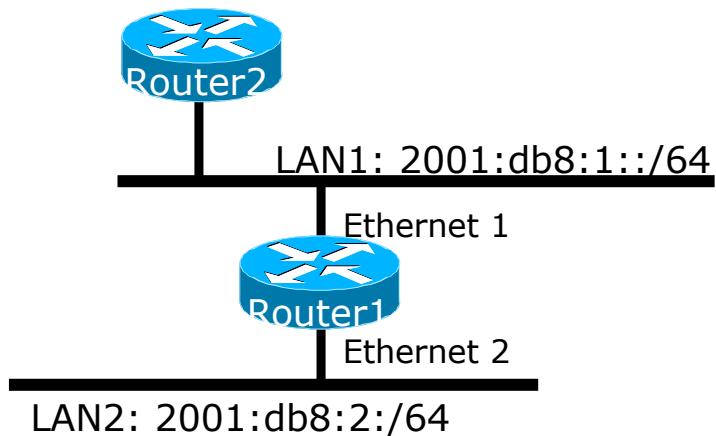

Dual IPv4/IPv6 configuration.  
Redistributing both IPv6 static routes  
and IPv4 static routes.

```
Router1#  
interface ethernet 1  
 ip address 10.1.1.1 255.255.255.0  
 ipv6 address 2001:db8:1::1/64  
 ip router isis  
 ipv6 router isis  
  
interface ethernet 2  
 ip address 10.2.1.1 255.255.255.0  
 ipv6 address 2001:db8:2::1/64  
 ip router isis  
 ipv6 router isis  
  
router isis  
 net 42.0001.0000.0000.072c.00  
 redistribute static  
 !  
 address-family ipv6  
  redistribute static  
 exit-address-family
```

# IS-IS Display (1)

---

```
router1#sh ipv6 route isis
IPv6 Routing Table - default - 46 entries
Codes: C - Connected, L - Local, S - Static, U - Per-user Static route
       B - BGP, HA - Home Agent, MR - Mobile Router, R - RIP
       I1 - ISIS L1, I2 - ISIS L2, IA - ISIS interarea, IS - ISIS summary
       D - EIGRP, EX - EIGRP external, ND - Neighbor Discovery, l - LISP
       O - OSPF Intra, OI - OSPF Inter, OE1 - OSPF ext 1, OE2 - OSPF ext 2
       ON1 - OSPF NSSA ext 1, ON2 - OSPF NSSA ext 2
I2 2001:DB8::2/128 [115/2]
    via FE80::C801:3CFF:FE4F:8, FastEthernet0/0
I2 2001:DB8::3/128 [115/20]
    via FE80::C802:3CFF:FE4F:0, Serial1/0
I2 2001:DB8::4/128 [115/22]
    via FE80::C801:3CFF:FE4F:8, FastEthernet0/0
I2 2001:DB8::5/128 [115/40]
    via FE80::C802:3CFF:FE4F:0, Serial1/0
I2 2001:DB8::6/128 [115/42]
    via FE80::C801:3CFF:FE4F:8, FastEthernet0/0
    via FE80::C802:3CFF:FE4F:0, Serial1/0
```

# IS-IS Display (2)

---

```
router1#sh isis ipv6 rib
IS-IS IPv6 process workshop, local RIB
* 2001:DB8::2/128
    via FE80::C801:3CFF:FE4F:8/FastEthernet0/0, type L2 metric 2 LSP [7/8]
* 2001:DB8::3/128
    via FE80::C802:3CFF:FE4F:0/Serial1/0, type L2 metric 20 LSP [2/8]
* 2001:DB8::4/128
    via FE80::C801:3CFF:FE4F:8/FastEthernet0/0, type L2 metric 22 LSP [8/8]
* 2001:DB8::5/128
    via FE80::C802:3CFF:FE4F:0/Serial1/0, type L2 metric 40 LSP [4/8]
* 2001:DB8::6/128
    via FE80::C801:3CFF:FE4F:8/FastEthernet0/0, type L2 metric 42 LSP [5/8]
    via FE80::C802:3CFF:FE4F:0/Serial1/0, type L2 metric 42 LSP [5/8]
* 2001:DB8::7/128
    via FE80::C802:3CFF:FE4F:0/Serial1/0, type L2 metric 60 LSP [A/8]
* 2001:DB8::8/128
    via FE80::C801:3CFF:FE4F:8/FastEthernet0/0, type L2 metric 62 LSP [6/8]
    via FE80::C802:3CFF:FE4F:0/Serial1/0, type L2 metric 62 LSP [6/8]
...
```

# ISIS Display (3)

```
Router2#sh clns is-neighbors detail
```

```
Tag Workshop:
```

System Id	Interface	State	Type	Priority	Circuit Id	Format
router1	Fa0/0	Up	L2	64	Router2.01	Phase V
Area Address(es): 49.0001						
IP Address(es): 10.0.15.1*						
IPv6 Address(es): FE80::C800:3CFF:FE4F:8						
Uptime: 00:07:31						
NSF capable						
Interface name: FastEthernet0/0						
Router4	Se1/0	Up	L2	0	00	Phase V
Area Address(es): 49.0001						
IP Address(es): 10.0.15.18*						
IPv6 Address(es): FE80::C803:3CFF:FE4F:0						
Uptime: 00:07:32						
NSF capable						
Interface name: Serial1/0						
Router14	Fa0/1	Up	L2	64	Router14.02	Phase V
Area Address(es): 49.0001						
IP Address(es): 10.0.15.26*						
IPv6 Address(es): FE80::C80D:3CFF:FE50:6						
Uptime: 00:08:40						
NSF capable						
Interface name: FastEthernet0/1						

# Multi-topology IS-IS



# Multi-Topology IS-IS extensions

---

- Multi-Topology is used by ISPs who are deploying IPv6 on an existing IPv4 infrastructure:
  - Running single topology IS-IS means that enabling IS-IS IPv6 on a point to point link must be done simultaneously at both ends
    - Otherwise the adjacency will go down, leading to possible breakage in the network
  - Adding new routers on a broadcast media in a single topology IS-IS is very tricky
    - IS-IS for IPv6 must be enabled on all devices on the broadcast media at the same time
    - Otherwise breakage in the network could occur due to adjacencies going down

# Multi-Topology IS-IS extensions

---

- IS-IS for IPv6 assumes that the IPv6 topology is the same as the IPv4 topology
  - Single SPF running, multiple address families
  - Some networks may be like this, but some others may not be
- Multi-Topology IS-IS solves this problem
  - New TLV attributes introduced
  - New Multi-Topology ID #2 for IPv6 Routing Topology
  - Two topologies maintained:
    - ISO/IPv4 Routing Topology
    - IPv6 Routing Topology

# Multi-Topology IS-IS Restrictions

---

- This feature is not compatible with the previous single SPF model
  - New TLV are used to transmit and advertise IPv6 capabilities
  - All routers that run IS-IS for IPv6 need to enable multi-topology within the network
  - A transition mode is provided for existing IS-IS IPv6 network to migrate to Multi-Topology IS-IS IPv6



# Multi-Topology IS-IS Restrictions

---


- IPv4 or IPv6 or IPv4/IPv6 may be configured on the interface for either level-1, level-2 or level-1-2
- If IPv4 and IPv6 are configured on the same interface, they must be running the same IS-IS level
  - IPv4 cannot be configured to run on IS-IS level-1 only on an interface while IPv6 is configured to run IS-IS level-2 only on the same interface.



# Multi-Topology IS-IS Restrictions

---

- All routers on a LAN or point-to-point link must have at least one common supported topology (IPv4 or IPv6) when operating in Multi-Topology IS-IS mode
  - N.B. a router that is not operating in Multi-Topology IS-IS IPv6 mode cannot form adjacency with Multi-Topology IS-IS IPv6 router, even though IPv6 is the common supported topology. However, if IPv4 is the common supported topology between those two routers, adjacency should be formed.
- Wide metrics are required to be enabled globally within the Autonomous System
  - (Default for most ISPs these days anyway)

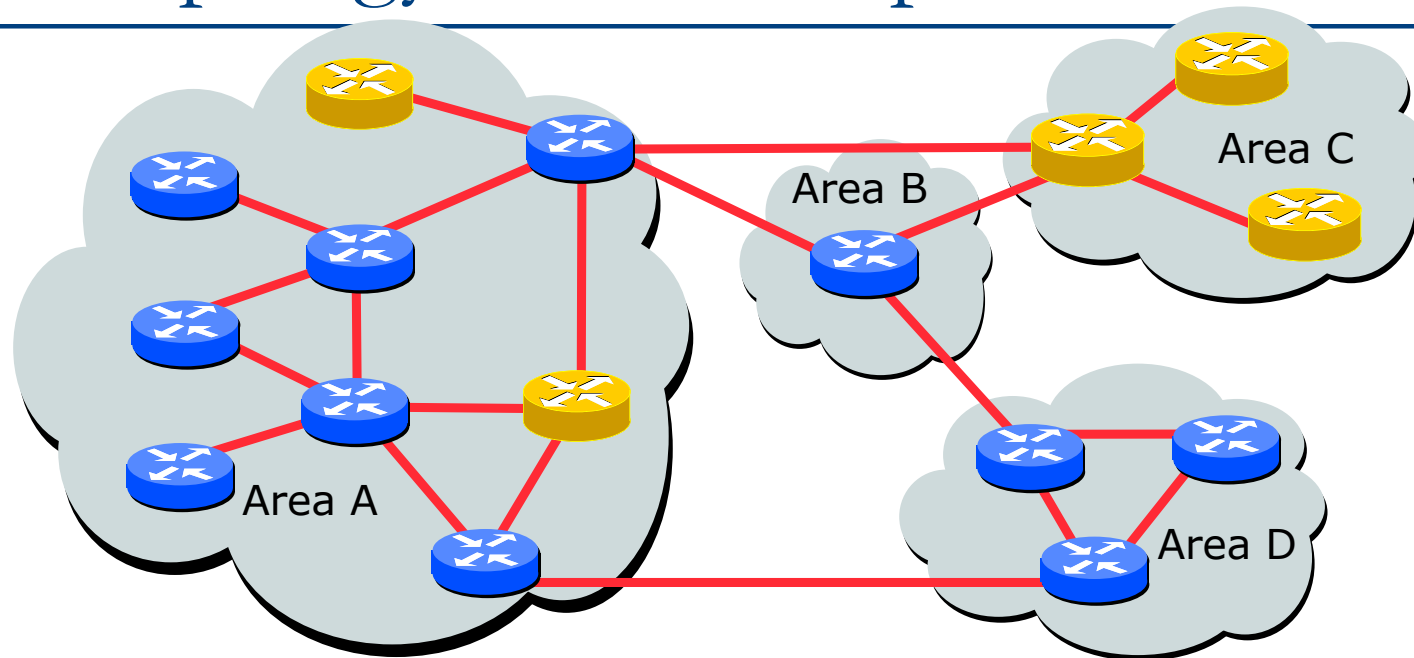
# Multi-Topology IS-IS example



-  IPv4-IPv6 enabled router
-  IPv4-only enabled router

The Multi-Topology software will create two topologies inside Area:  
IPv4 and IPv6.  
IPv4-only routers will be excluded from the IPv6 topology

# Multi-Topology IS-IS Configuration example

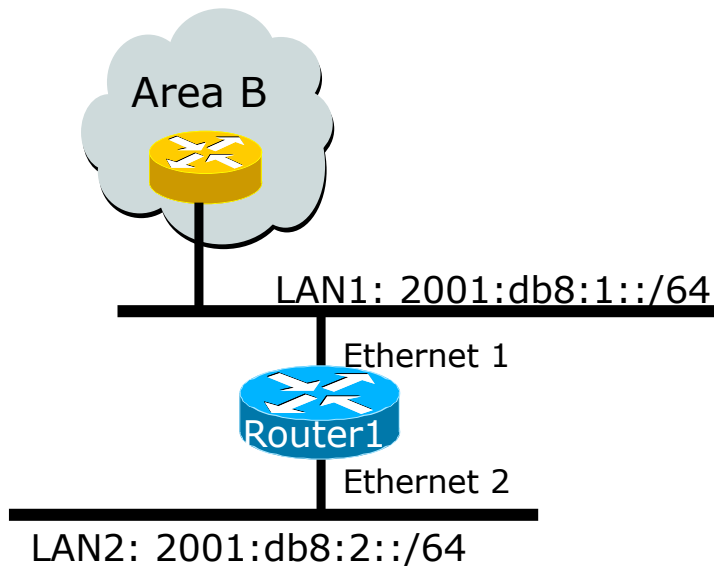

- The optional keyword **transition** may be used for transitioning existing IS-IS IPv6 single SPF mode to MT IS-IS
- Wide metric is mandated for Multi-Topology to work

```
Router1#  
interface Ethernet 1  
 ip address 10.1.1.1 255.255.255.0  
 ipv6 address 2001:db8:1::1/64  
 ip router isis  
 ipv6 router isis  
 isis ipv6 metric 20  
  
interface Ethernet 2  
 ip address 10.2.1.1 255.255.255.0  
 ipv6 address 2001:db8:2::1/64  
 ip router isis  
 ipv6 router isis  
 isis ipv6 metric 20  
  
router isis isp  
 net 49.0000.0100.0000.0500.00  
 metric-style wide  
 !  
 address-family ipv6  
 multi-topology  
 exit-address-family
```

# Narrow to Wide Metrics Transition

---

- ❑ When migrating from narrow to wide metrics, care is required
  - Narrow and wide metrics are NOT compatible with each other
  - Migration is a two stage process, using the “transition” keyword
- ❑ Networks using narrow metrics should first configure across all routers:

```
router isis isp  
metric-style transition
```

- ❑ Once the whole network is changed to transition support, the metric style can be changed to wide:

```
router isis isp  
metric-style wide
```

# Multi-Topology IS-IS Display

```
Router2# show clns neighbors detail
```

```
Tag workshop:
```

System Id	Interface	SNPA	State	Holdtime	Type	Protocol
Router2	Fa0/0	ca01.3c4f.0008	Up	7	L2	M-ISIS

Area Address(es): 49.0001  
IP Address(es): 10.0.15.2\*  
IPv6 Address(es): FE80::C801:3CFF:FE4F:8  
Uptime: 00:01:46  
NSF capable  
Topology: IPv4, IPv6  
Interface name: FastEthernet0/0

```
Router2# show isis database detail
```

```
Tag workshop:
```

```
IS-IS Level-2 Link State Database:
```

LSPID	LSP Seq Num	LSP Checksum	LSP Holdtime	ATT/P/OL
router1.00-00	* 0x00000006	0xD3D1	1112	0/0/0

Area Address: 49.0001  
Topology: IPv4 (0x0)  
IPv6 (0x2)  
NLPID: 0xCC 0x8E  
Hostname: router1  
IP Address: 10.0.15.241  
IPv6 Address: 2001:DB8::1

Metric: 2	IS-Extended Router2.01
Metric: 20	IS-Extended Router3.00
Metric: 2	IS-Extended Router13.02
Metric: 2	IS (MT-IPv6) Router2.01
Metric: 20	IS (MT-IPv6) Router3.00
Metric: 2	IS (MT-IPv6) Router13.02

# Multi-Topology IS-IS Support

---

- In Cisco IOS:
  - Supported in 12.2SRE, 12.2SXH, 12.4T, and 15.0 onwards
  - The commands for MT are in 12.3 and 12.4 but do not work
    - The only workaround is to use single topology or change to the knowing working releases
- In Cisco IOS-XE:
  - Supported in 3.3 or later
- In Cisco IOS-XR:
  - Supported in 3.9 or later
  - Note: MT is enabled by default
- In Juniper JunOS:
  - Supported in 9.0 or later

# IS-IS for IPv6



ISP Workshops