

Using BGP Communities

ISP Workshops



These materials are licensed under the Creative Commons Attribution-NonCommercial 4.0 International license (<http://creativecommons.org/licenses/by-nc/4.0/>)

Last updated 11th May 2021

Acknowledgements

- This material originated from the Cisco ISP/IXP Workshop Programme developed by Philip Smith & Barry Greene
- Use of these materials is encouraged as long as the source is fully acknowledged and this notice remains in place
- Bug fixes and improvements are welcomed
 - Please email *workshop (at) bgp4all.com*

Philip Smith

BGP Videos

- NSRC has produced a library of BGP presentations (including this one), recorded on video, for the whole community to use
 - <https://learn.nsrc.org/bgp>

The screenshot displays the NSRC (Network Startup Resource Center) website. The top navigation bar includes links for Home, About, BGP for All (highlighted), perfSONAR, ScienceDMZ, FedIdM, and Contact Us, along with a search bar. The main content area is divided into three columns:

- BGP for All:** A text-based introduction to BGP, explaining its role as the primary routing protocol for the Internet and autonomous systems. It also mentions that understanding routing options can lead to efficiencies and collaboration opportunities.
- Introduction to Routing:** A list of video topics including Internet Routing, Routing Protocols, Introduction to IS-IS (UPDATED), IS-IS Levels, IS-IS Adjacencies, Best Configuration Practices for IS-IS on Cisco IOS, IS-IS Authentication, Default Routes and IPv6, Introduction to OSPF, OSPF Areas, OSPF Adjacencies, Best Configuration Practices for OSPF on Cisco IOS, OSPF Authentication, Default Routes and IPv6, Comparing OSPF and IS-IS, Choosing between OSPF and IS-IS, Migrating from OSPF to IS-IS, Migration Plan, and Finalizing Migration.
- Introduction to BGP:** A list of video topics including Introduction to Border Gateway Protocol, Transit and Peering, Autonomous Systems (UPDATED), How BGP works, Supporting Multiple Protocols, IBGP versus EBGP, Setting up EBGP, and Setting up IBGP.

On the right side, there is a video player for "BGP for All" with a play button and a "Watch on YouTube" button. Below the video player, there are sections for "BGP Case Studies" (listing Peering Priorities, Transit Provider Peering at an IXP, Customer Multihomed between two IXP members, Traffic Engineering for an ISP connected to two IXes, Traffic Engineering for an ISP with two interfaces on one IX LAN, and Traffic Engineering and CDNs) and "Communities" (listing RFC 1998 Traffic Engineering, Simplifying Traffic Engineering, How to Apply Communities to Originated Routes, and How to Use Communities for Service Identification).



Multihoming and Communities

- The BGP community attribute is a very powerful tool for assisting and scaling BGP Policies and BGP Multihoming
- Most major Network Operators make extensive use of BGP communities:
 - Internal policies
 - Inter-provider relationships (MED replacement)
 - Customer traffic engineering



Using BGP Communities

- Four scenarios are covered:
 - Use of RFC1998 traffic engineering
 - Extending RFC1998 ideas for even greater customer policy options
 - Community use in Network Operator backbones
 - Customer Policy Control (aka traffic engineering)

RFC1998



An example of how Network Operators use
communities...

RFC1998

- Informational RFC
- Describes how to implement loadsharing and backup on multiple inter-AS links
 - BGP communities used to determine local preference in upstream's network
- Gives control to the customer
 - Means the customer does not have to phone upstream's technical support to adjust traffic engineering needs
- Simplifies upstream's configuration
 - Simplifies network operation!

RFC1998

- RFC1998 Community values are defined to have particular meanings
- ASx:100 `set local preference 100`
 - Make this the preferred path
- ASx :90 `set local preference 90`
 - Make this the backup if dualhomed on ASx
- ASx :80 `set local preference 80`
 - The main link is to another provider with same AS path length
- ASx :70 `set local preference 70`
 - The main link is to another provider

RFC1998

- Upstream Provider defines the communities mentioned
- Their customers then attach the communities they want to use to the prefix announcements they are making
- For example:
 - If upstream is AS 100
 - To declare a particular path as a backup path, their customer would announce the prefix with community 100:70 to AS100
 - AS100 would receive the prefix with the community 100:70 tag, and then set local preference to be 70

RFC1998

□ Sample End-Site Router Configuration

```
router bgp 130
  address-family ipv4
    neighbor 100.66.32.1 remote-as 100
    neighbor 100.66.32.1 description Backup Provider
    neighbor 100.66.32.1 route-map as100-out out
    neighbor 100.66.32.1 send-community
    neighbor 100.66.32.1 activate
  !
  ip as-path access-list 20 permit ^$
  !
  route-map as100-out permit 10
    match as-path 20
    set community 100:70
  !
```

RFC1998

□ Sample Upstream Router Configuration

```
router bgp 100
  address-family ipv4
    neighbor 100.66.32.2 remote-as 130
    neighbor 100.66.32.2 route-map customer-policy-in in
    neighbor 100.66.32.2 activate
  !
  ! Homed to another Provider
  ip community-list standard rfc1998-70 permit 100:70
  ! Homed to another Provider with equal AS_PATH length
  ip community-list standard rfc1998-80 permit 100:80
  ! Customer backup routes
  ip community-list standard rfc1998-90 permit 100:90
  !
```

RFC1998

```
route-map customer-policy-in permit 10
  match community rfc1998-70
  set local-preference 70
!
route-map customer-policy-in permit 20
  match community rfc1998-80
  set local-preference 80
!
route-map customer-policy-in permit 30
  match community rfc1998-90
  set local-preference 90
!
route-map customer-policy-in permit 40
  set local-preference 100
!
```


RFC1998

- ❑ RFC1998 was the inspiration for a large variety of differing community policies implemented by Network Operators worldwide
- ❑ There are no “standard communities” for what ISPs do
- ❑ But best practices today consider that Network Operators should use BGP communities extensively for multihoming support of traffic engineering
- ❑ Look in the Network Operator AS Object in the IRR for documented community support

RFC1998 Example

Two links to the same AS, one link primary, the other link backup

Two links to the same AS

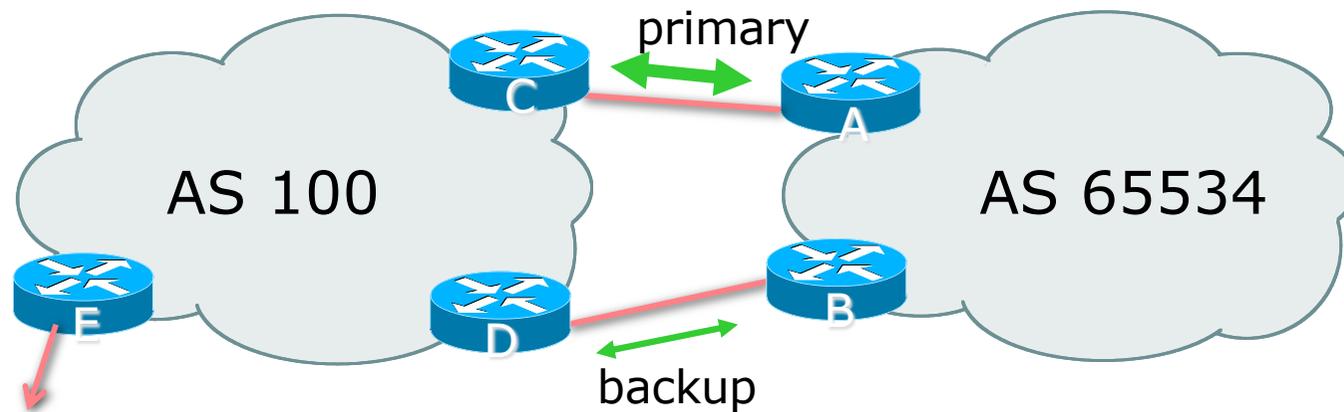

- AS100 proxy aggregates for AS 65534

Two links to the same AS (one as backup only)

- Announce /19 aggregate on each link
 - primary link makes standard announcement
 - backup link sends community
- When one link fails, the announcement of the /19 aggregate via the other link ensures continued connectivity

Two links to the same AS (one as backup only)

□ Router A Configuration

```
router bgp 65534
  address-family ipv4
    network 100.64.0.0 mask 255.255.224.0
    neighbor 100.66.10.2 remote-as 100
    neighbor 100.66.10.2 description RouterC
    neighbor 100.66.10.2 prefix-list aggregate out
    neighbor 100.66.10.2 prefix-list default in
    neighbor 100.66.10.2 activate
  !
ip prefix-list aggregate permit 100.64.0.0/19
ip prefix-list default permit 0.0.0.0/0
!
```

Two links to the same AS (one as backup only)

□ Router B Configuration

```
router bgp 65534
  address-family ipv4
    network 100.64.0.0 mask 255.255.224.0
    neighbor 100.66.10.6 remote-as 100
    neighbor 100.66.10.6 description RouterD
    neighbor 100.66.10.6 send-community
    neighbor 100.66.10.6 prefix-list aggregate out
    neighbor 100.66.10.6 route-map routerD-out out
    neighbor 100.66.10.6 prefix-list default in
    neighbor 100.66.10.6 route-map routerD-in in
    neighbor 100.66.10.6 activate
!
..next slide..
```

Two links to the same AS (one as backup only)

```
ip prefix-list aggregate permit 100.64.0.0/19
ip prefix-list default permit 0.0.0.0/0
!
route-map routerD-out permit 10
  match ip address prefix-list aggregate
  set community 100:90
route-map routerD-out permit 20
!
route-map routerD-in permit 10
  set local-preference 90
!
```

Two links to the same AS (one as backup only)

□ Router C Configuration (main link)

```
router bgp 100
  address-family ipv4
    neighbor 100.66.10.1 remote-as 65534
    neighbor 100.66.10.1 default-originate
    neighbor 100.66.10.1 prefix-list Customer in
    neighbor 100.66.10.1 prefix-list default out
    neighbor 100.66.10.1 activate
!
ip prefix-list Customer permit 100.64.0.0/19
ip prefix-list default permit 0.0.0.0/0
```

Two links to the same AS (one as backup only)

□ Router D Configuration (backup link)

```
router bgp 100
  address-family ipv4
    neighbor 100.66.10.5 remote-as 65534
    neighbor 100.66.10.5 default-originate
    neighbor 100.66.10.5 prefix-list Customer in
    neighbor 100.66.10.5 route-map bgp-cust-in in
    neighbor 100.66.10.5 prefix-list default out
    neighbor 100.66.10.5 activate
!
ip prefix-list Customer permit 100.64.0.0/19
ip prefix-list default permit 0.0.0.0/0
!
...next slide...
```

Two links to the same AS (one as backup only)

```
!  
ip community-list standard rfc1998-90 permit 100:90  
!  
route-map bgp-cust-in permit 10  
  match community rfc1998-70  
  set local-preference 70  
route-map bgp-cust-in permit 20  
  match community rfc1998-80  
  set local-preference 80  
route-map bgp-cust-in permit 30  
  match community rfc1998-90  
  set local-preference 90  
route-map bgp-cust-in permit 40  
  set local-preference 100  
!
```

Two links to the same AS (one as backup only)

- This is a simple example
- It looks more complicated than the same example presented earlier which used local preference and MEDs
- But the advantage is that this scales better
 - With larger configurations, more customers, more options, it becomes easier to handle each and every requirement

Service Provider use of Communities



RFC1998 was so inspiring...



Background

- RFC1998 is okay for “simple” multihoming situations
- Network Operators create backbone support for many other communities to handle more complex situations
 - Simplify Network Operator BGP configuration
 - Give customer more policy control

Network Operator BGP Communities

- There are no recommended Network Operator BGP communities apart from
 - RFC1998
 - The well-known communities
 - www.iana.org/assignments/bgp-well-known-communities
- Efforts have been made to document from time to time
 - totem.info.ucl.ac.be/publications/papers-elec-versions/draft-quoitin-bgp-comm-survey-00.pdf
 - But so far... nothing more... ☹
 - Collection of Network Operator communities at www.onesc.net/communities
 - NANOG Tutorial:
www.nanog.org/meetings/nanog40/presentations/BGPcommunities.pdf
- Network Operator policy is usually published
 - On the Operator's website
 - Referenced in the AS Object in the IRR

Typical Network Operator BGP Communities

- X:80 **set local preference 80**
 - Backup path
- X:120 **set local preference 120**
 - Primary path (over ride BGP path selection default)
- X:1 **set as-path prepend X**
 - Single prepend when announced to X's upstreams
- X:2 **set as-path prepend X X**
 - Double prepend when announced to X's upstreams
- X:3 **set as-path prepend X X X**
 - Triple prepend when announced to X's upstreams
- X:666 **set ip next-hop 192.0.2.1**
 - Blackhole route – very useful for DoS attack mitigation (RFC7999)

Sample Router Configuration (1)

```
router bgp 100
  address-family ipv4
    neighbor 100.66.32.2 remote-as 130
    neighbor 100.66.32.2 route-map customer-policy-in in
    neighbor 100.66.32.2 activate
    neighbor 100.65.8.9 remote-as 200
    neighbor 100.65.8.9 route-map upstream-out out
    neighbor 100.65.8.9 activate
  !
ip community-list standard prepend-1 permit 100:1
ip community-list standard prepend-2 permit 100:2
ip community-list standard prepend-3 permit 100:3
ip community-list standard lp-80 permit 100:80
ip community-list standard lp-120 permit 100:120
ip community-list standard RTBH permit 100:666
!
ip route 192.0.2.1 255.255.255.255 null0
```

Customer BGP

Upstream BGP

Black hole route
(on all routers)

Sample Router Configuration (2)

```
route-map customer-policy-in permit 10
  match community lp-80
  set local-preference 80
!
route-map customer-policy-in permit 20
  match community lp-120
  set local-preference 120
!
route-map customer-policy-in permit 30
  match community RTBH
  set ip next-hop 192.0.2.1
!
route-map customer-policy-in permit 40

...etc...
```

Sample Router Configuration (3)

```
route-map upstream-out permit 10
  match community prepend-1
  set as-path prepend 100
!
route-map upstream-out permit 20
  match community prepend-2
  set as-path prepend 100 100
!
route-map upstream-out permit 30
  match community prepend-3
  set as-path prepend 100 100 100
!
route-map upstream-out permit 40

...etc...
```

WHAT YOU CAN CONTROL

AS-PATH PREPENDS

Sprint allows customers to use AS-path prepending to adjust route preference on the network. Such prepending will be received and passed on properly without notifying Sprint of your change in announcements.

Additionally, Sprint will prepend AS1239 to eBGP sessions with certain autonomous systems depending on a received community. Currently, the following ASes are supported: 1668, 209, 2914, 3300, 3356, 3549, 3561, 4635, 701, 7018, 702 and 8220.

String Resulting AS Path to ASXXX

65000:XXX	Do not advertise to ASXXX
65001:XXX	1239 (default) ...
65002:XXX	1239 1239 ...
65003:XXX	1239 1239 1239 ...
65004:XXX	1239 1239 1239 1239 ...

Example: Sprint

String Resulting AS Path to ASXXX in Asia

65070:XXX	Do not advertise to ASXXX
65071:XXX	1239 (default) ...
65072:XXX	1239 1239 ...
65073:XXX	1239 1239 1239 ...
65074:XXX	1239 1239 1239 1239 ...

String Resulting AS Path to ASXXX in Europe

65050:XXX	Do not advertise to ASXXX
65051:XXX	1239 (default) ...
65052:XXX	1239 1239 ...
65053:XXX	1239 1239 1239 ...
65054:XXX	1239 1239 1239 1239 ...

More info at
https://www.sprint.net/index.php?p=policy_bgp

BGP customer communities

Customers wanting to alter local preference on their routes.

NTT BGP customers may choose to affect our local preference on their routes by marking their routes with the following communities. Our regions are listed [here](#).

Community	Local-pref	Description
(default)	120	customer
65520:nnnn	50	only within country origin <nnnn> (see country origin list below)
65530:nnnn	50	only within region <nnnn> (see region list below)
2914:435	50	only beyond the connected country
2914:436	50	only beyond the connected region
2914:450	96	customer fallback
2914:460	98	peer backup
2914:470	100	peer
2914:480	110	customer backup
2914:490	120	customer default
2914:666		blackhole

Example: NTT

Customers wanting to alter their route announcements to other customers.

NTT BGP customers may choose to prepend to all other NTT BGP customers with the following communities:

Community	Description
2914:411	prepends o/b to customer 1x
2914:412	prepends o/b to customer 2x
2914:413	prepends o/b to customer 3x

Customers wanting to alter their route announcements to peers.

NTT BGP customers may choose to prepend to all NTT peers with the following communities:

Community	Description
2914:421	prepends o/b to peer 1x
2914:422	prepends o/b to peer 2x
2914:423	prepends o/b to peer 3x
2914:429	do not advertise to any peer
2914:439	do not advertise to any peer outside region

Note: 2914 is the ASN prepend in all cases. If used, 654xx:nnn overrides 655xx:nnn and 2914:429, 655xx:nnn overrides the 2914:42x communities.

Create Routing Registry Objects

Using PGP Authentication

Frequently Asked Questions

UTC Conversion Chart

Get More Information

 [Product Collateral](#)

 [Case Studies](#)

 [White Papers](#)

 [Audio & Video](#)

Get Started

To find out which solutions will best benefit your business, contact one of our Account Managers.

 [Click Here to Get Connected](#)

 Call us at +1 425-250-7051

Stay Connected

 [Follow Us on Twitter](#)

 [Friend Us on Facebook](#)

 [Join Us on LinkedIn](#)

More info at
<http://www.us.ntt.net/support/policy/routing.cfm>

Example: Verizon Europe

```
aut-num:      AS702
descr:        Verizon Business EMEA - Commercial IP service provider in Europe
<snip>
remarks:      -----
               Verizon Business filters out inbound prefixes longer than /24.
               We also filter any networks within AS702:RS-INBOUND-FILTER.
               -----

               VzBi uses the following communities with its customers:
               702:80   Set Local Pref 80 within AS702
               702:120 Set Local Pref 120 within AS702
               702:20   Announce only to VzBi AS'es and VzBi customers
               702:30   Keep within Europe, don't announce to other VzBi AS's
               702:1    Prepend AS702 once at edges of VzBi to Peers
               702:2    Prepend AS702 twice at edges of VzBi to Peers
               702:3    Prepend AS702 thrice at edges of VzBi to Peers
               -----

               Advanced communities for customers
               702:7020 Do not announce to AS702 peers with a scope of
               National but advertise to Global Peers, European
               Peers and VzBi customers.
               702:7001 Prepend AS702 once at edges of VzBi to AS702
               peers with a scope of National.
               702:7002 Prepend AS702 twice at edges of VzBi to AS702
               peers with a scope of National.
               -----

               Additional details of the VzBi communities are located at:
               http://www.verizonbusiness.com/uk/customer/bgp/
```

<snip>

← And many more!

Example: Telia


```
aut-num:      AS1299
descr:        TeliaSonera International Carrier
<snip>
remarks:      BGP COMMUNITY SUPPORT FOR AS1299 TRANSIT CUSTOMERS:
remarks:
remarks:      Community Action (default local pref 200)
remarks:      -----
remarks:      1299:50 Set local pref 50 within AS1299 (lowest possible)
remarks:      1299:150 Set local pref 150 within AS1299 (equal to peer, backup)
remarks:
remarks:      European peers
remarks:      Community Action
remarks:      -----
remarks:      1299:200x All peers Europe incl:
remarks:
remarks:      1299:250x Sprint/1239
remarks:      1299:252x NTT/2914
remarks:      1299:253x Zayo/Abovenet/6461
remarks:      1299:254x Orange/FT/5511
remarks:      1299:256x Level3/3356
remarks:      1299:257x Verizon/702
remarks:      1299:258x AT&T/2686
remarks:      1299:259x Telxius/Telefonica/12956
remarks:      1299:261x Centurylink/Qwest/3910
remarks:      1299:263x TATA/6453
remarks:      1299:264x DTAG/3320
<snip>
remarks:      Where x is number of prepends (x=0,1,2,3) or do NOT announce (x=9)
```

And many
many more!

Example: BT Ignite

```
aut-num:      AS5400
descr:       BT Ignite European Backbone
<snip>
remarks:     The following BGP communities can be set by BT
remarks:     BGP customers to affect announcements to major peers.
remarks:
remarks:     5400:NXXX
remarks:     N=1      not announce
remarks:     N=2      prepend an extra "5400 5400" on announcement
remarks:     Valid values for XXX:
remarks:     000      All peers and transits
remarks:     500      All transits
remarks:     503      Level3 AS3356
remarks:     509      Telia AS1299
remarks:     510      NTT Verio AS2914
remarks:     002      Sprint AS1239
remarks:     003      Savvis AS3561
remarks:     004      C&W AS1273
remarks:     005      Verizon EMEA AS702
remarks:     014      DTAG AS3320
remarks:     016      Opentransit AS5511
remarks:     018      GlobeInternet Tata AS6453
remarks:     023      Tinet AS3257
remarks:     027      Telia AS1299
remarks:     045      Telecom Italia AS6762
remarks:     073      Eurorings AS286
remarks:     169      Cogent AS174
<snip>
```


And many
more!



Example: Level3

```
aut-num:      AS3356
descr:       Level 3 Communications
<snip>
remarks:     -----
remarks:     customer traffic engineering communities - Suppression
remarks:     -----
remarks:     64960:XXX - announce to AS XXX if 65000:0
remarks:     65000:0  - announce to customers but not to peers
remarks:     65000:XXX - do not announce at peerings to AS XXX
remarks:     -----
remarks:     customer traffic engineering communities - Prepending
remarks:     -----
remarks:     65001:0  - prepend once  to all peers
remarks:     65001:XXX - prepend once  at peerings to AS XXX
remarks:     65002:0  - prepend twice to all peers
remarks:     65002:XXX - prepend twice at peerings to AS XXX
<snip>
remarks:     -----
remarks:     customer traffic engineering communities - LocalPref
remarks:     -----
remarks:     3356:70  - set local preference to 70
remarks:     3356:80  - set local preference to 80
remarks:     3356:90  - set local preference to 90
remarks:     -----
remarks:     customer traffic engineering communities - Blackhole
remarks:     -----
remarks:     3356:9999 - blackhole (discard) traffic
<snip>
```

And many
more!





Creating your own community policy

- Consider creating communities to give policy control to customers
 - Reduces technical support burden
 - Reduces the amount of router reconfiguration, and the chance of mistakes
 - Use previous Network Operator and configuration examples as a guideline

Using Communities for Backbone Scaling



Scaling BGP in the Service Provider
backbone...



Communities for iBGP

- Network Operators tag prefixes learned from their BGP and static customers with communities
 - To identify services the customer may have purchased
 - To identify prefixes which are part of the Provider's PA space
 - To identify PI customer addresses
 - To control prefix distribution in iBGP
 - To control prefix announcements to customers and upstreams
 - (amongst several other reasons)

Service Identification

- Network Operator provides:
 - Transit via upstreams
 - Connectivity via major IXP
 - Connectivity to private peers/customers
- Customers can buy all or any of the above access options
 - Each option is identified with a unique community
- Network Operator identifies whether address space comes from their PA block or is their customers' own PI space
 - One community for each

Community Definitions

100:1000	AS100 aggregates
100:1001	AS100 aggregate subprefixes
100:1005	Static Customer PI space
100:2000	Customers who get Transit
100:2100	Customers who get IXP access
100:2200	Customers who get BGP Customer access
100:3000	Routes learned from the IXP

```
ip community-list standard aggregates permit 100:1000
ip community-list standard subnets permit 100:1001
ip community-list standard pi permit 100:1005
ip community-list standard transits permit 100:2000
ip community-list standard ixp-access permit 100:2100
ip community-list standard bgp-cust permit 100:2200
ip community-list standard ixp-routes permit 100:3000
```

Aggregates and Static Customers into BGP

```
router bgp 100
  address-family ipv4
    network 100.64.0.0 mask 255.255.224.0 route-map as100-prefixes
    redistribute static route-map static-to-bgp
  !
  ip prefix-list as100-block permit 100.64.0.0/19 le 32
  !
  route-map as100-prefixes permit 10
    set community 100:1000
  !
  route-map static-to-bgp permit 10
    match ip address prefix-list as100-block
    set community 100:1001
  route-map static-to-bgp permit 20
    set community 100:1005
```

The diagram shows a BGP configuration for router 100. It includes an IPv4 address family with a network statement and a redistribute static statement. A prefix-list named 'as100-block' is defined. Three route-maps are configured: 'as100-prefixes' (permit 10) sets community 100:1000; 'static-to-bgp' (permit 10) matches the prefix-list and sets community 100:1001; and 'static-to-bgp' (permit 20) sets community 100:1005. Arrows point from text boxes to the corresponding configuration lines.

Aggregate community set

Aggregate subprefixes community set

PI community is set

Service Identification

- AS100 has four classes of BGP customers
 - Full transit (upstream, IXP and BGP customers)
 - Upstream only
 - IXP only
 - BGP Customers only
- For BGP support, easiest IOS configuration is to create a peer-group for each class (can also use peer-templates to simplify further)
 - Customer is assigned the peer-group of the service they have purchased
 - Simple for AS100 customer installation engineer to provision

BGP Customers

Creating peer-groups

```
router bgp 100
  address-family ipv4
    neighbor full-transit peer-group
    neighbor full-transit route-map customers-out out
    neighbor full-transit route-map full-transit-in in
    neighbor full-transit default-originate
    neighbor upstream-only peer-group
    neighbor upstream-only route-map customers-out out
    neighbor upstream-only route-map upstream-only-in in
    neighbor upstream-only default-originate
    neighbor ixp-only peer-group
    neighbor ixp-only route-map ixp-routes out
    neighbor ixp-only route-map ixp-only-in in
    neighbor bgpcust-only peer-group
    neighbor bgpcust-only route-map bgp-cust-out out
    neighbor bgpcust-only route-map bgp-cust-in in
```

BGP Customers

Creating route-maps

```
route-map customers-out permit 10
  match ip community aggregates ←
  !
route-map full-transit-in permit 10
  set community 100:2000 100:2100 100:2200 ←
  !
route-map upstream-only-in permit 10
  set community 100:2000
  !
route-map ixp-routes permit 10
  match ip community aggregates pi transits ixp-access ixp-routes
  !
route-map ixp-only-in permit 10
  set community 100:2100
  !
route-map bgp-cust-out permit 10
  match ip community aggregates pi transits bgp-custs ←
  !
route-map bgp-cust-in permit 10
  set community 100:2200
```

Customers only get AS100 aggregates and default route

Full transit go everywhere

Customers buying IXP access only get aggregates, static & full transit customers and IXP routes

Customers buying BGP customer access only get aggregates, static & full transit customers and other BGP customers

BGP Customers – configuring customers

```
router bgp 100
  address-family ipv4
    neighbor 100.67.3.2 remote-as 200
    neighbor 100.67.3.2 peer-group full-transit
    neighbor 100.67.3.2 prefix-list as200cust-in
    neighbor 100.67.3.2 activate
    neighbor 100.67.3.6 remote-as 300
    neighbor 100.67.3.6 peer-group upstream-only
    neighbor 100.67.3.6 prefix-list as300cust-in
    neighbor 100.67.3.6 activate
    neighbor 100.67.3.10 remote-as 400
    neighbor 100.67.3.10 peer-group ixp-only
    neighbor 100.67.3.10 prefix-list as400cust-in
    neighbor 100.67.3.10 activate
    neighbor 100.67.3.14 remote-as 500
    neighbor 100.67.3.14 peer-group bgpcust-only
    neighbor 100.67.3.14 prefix-list as500cust-in
    neighbor 100.67.3.14 activate
```

Customers are placed into the appropriate peer-group depending on the service they paid for

Note the specific per-customer inbound filters

BGP Customers – configuring upstream

```
router bgp 100
  address-family ipv4
    neighbor 100.66.32.1 remote-as 130
    neighbor 100.66.32.1 prefix-list full-routes in
    neighbor 100.66.32.1 route-map upstream-out out
    neighbor 100.66.32.1 activate
  !
  route-map upstream-out permit 10
    match ip community aggregates pi transits
  !
  ! IP prefix-list full-routes is the standard bogon
  ! prefix filter - or use a reputable bogon
  ! route-service such as that offered by Team Cymru
```

Aggregates, PI customers
and full transit customers
are announced to upstream

BGP Customers – configuring IXP peers

```
router bgp 100
  address-family ipv4
    neighbor 100.70.0.1 remote-as 901
    neighbor 100.70.0.1 route-map ixp-peers-out out
    neighbor 100.70.0.1 route-map ixp-peers-in in
    neighbor 100.70.0.1 prefix-list AS901-peer in
    neighbor 100.70.0.1 activate
    neighbor 100.70.0.2 remote-as 902
    neighbor 100.70.0.2 route-map ixp-peers-out out
    neighbor 100.70.0.2 route-map ixp-peers-in in
    neighbor 100.70.0.2 prefix-list AS902-peer in
    neighbor 100.70.0.2 activate
  !
  route-map ixp-peers-out permit 10
    match ip community aggregates pi transits ixp-access
  !
  route-map ixp-peers-in permit 10
    set community 100:3000
```

Aggregates, PI
customers full transit
and IXP customers are
announced to the IXP



Service Identification

- While the community set up takes a bit of thought and planning, once it is implemented:
 - eBGP configuration with customers is simply a case of applying the appropriate peer-group
 - eBGP configuration with IXP peers is simply a case of announcing the appropriate community members to the peers
 - eBGP configuration with upstreams is simply a case of announcing the appropriate community members to the upstreams
- All BGP policy internally is now controlled by communities
 - No prefix-lists, as-path filters, route-maps or other BGP gymnastics are required

What about iBGP itself?

- We've made good use of communities to handle customer requirements
 - But what about iBGP?
- Most Network Operators deploy Route Reflectors as a means of scaling iBGP
- In transit networks:
 - Core routers (the Route Reflectors) carry the full BGP table
 - Edge/Aggregation routers carry domestic prefixes & customers

iBGP core router/route reflector

```
router bgp 100
address-family ipv4
  neighbor rrc peer-group
  neighbor rrc descr Route Reflector Clients
  neighbor rrc remote-as 100
  neighbor rrc route-reflector-client
  neighbor rrc route-map ibgp-filter out
  neighbor rrc send-community
  neighbor ibgp-peer peer-group
  neighbor ibgp-peer Standard iBGP peers
  neighbor ibgp-peer remote-as 100
  neighbor ibgp-peer send-community
  neighbor 100.64.0.1 peer-group ibgp-peer
  neighbor 100.64.0.1 activate
  neighbor 100.64.0.2 peer-group rrc
  neighbor 100.64.0.2 activate
!
route-map ibgp-filter permit 10
match community aggregates subnets pi transits ixp-access bgp-cust ixp-routes
!
```

The filter to restrict client iBGP to just domestic prefixes

Must NOT forget to send community to iBGP peers

Allow all prefixes coming from the domestic network & IXP



iBGP in the core

- Notice that the filtering of iBGP from the core to the edge is again achieved by a simple route-map applying a community match
 - No prefix-lists, as-path filters or any other complicated policy
 - Once the prefix belongs to a certain community, it has the access across the backbone determined by the community policy in force

Using Communities for Customers Policy



Giving policy control to customers...



Customer Policy Control

- ❑ Network Operators have a choice on how to handle policy control for customers
- ❑ No delegation of policy options:
 - Customer has no choices
 - If customer wants changes, the operator's Technical Support handles it
- ❑ Limited delegation of policy options:
 - Customer has choices
 - The operator's Technical Support does not need to be involved
- ❑ BGP Communities are the only viable way of offering policy control to customers

Policy Definitions

□ Typical definitions:

Community	Action
Nil:	No community set, just announce everywhere
X:1	1x prepend to all BGP neighbours
X:2	2x prepend to all BGP neighbours
X:3	3x prepend to all BGP neighbours
X:80	Local preference set to 80 on customer prefixes
X:120	Local preference set to 120 on customer prefixes
X:666	Black hole this route please! (RFC7999)
X:5000	Don't announce to any BGP neighbour
X:5MM0	Don't announce to BGP neighbour MM
X:5MMN	Prepend N times to BGP neighbour MM

Policy Implementation

- The BGP configuration for the initial communities was discussed at the start of this slide set
- But the new communities, X:5MMN, are worth covering in more detail
 - The operator in AS X documents the BGP transits and peers that they have (MM can be 01 to 99)
 - The operator in AS X indicates how many prepends they will support (N can be 1 to 9, but realistically 4 prepends is usually enough on today's Internet)
 - Customers then construct communities to do the prepending or announcement blocking they desire
- If a customer tags a prefix announcement with:
 - 100:5030 don't send prefix to BGP neighbour 03
 - 100:5102 2x prepend prefix announcement to peer 10

Community Definitions

- Example: Operator in AS 100 has two upstreams. They create policy based on previous slide to allow no announce and up to 3 prepends for their customers

```
ip community-list standard all-noann permit 100:5000
ip community-list standard all-pre1 permit 100:5001
ip community-list standard all-pre2 permit 100:5002
ip community-list standard all-pre3 permit 100:5003
ip community-list standard peer1-noann permit 100:5010
ip community-list standard peer1-pre1 permit 100:5011
ip community-list standard peer1-pre2 permit 100:5012
ip community-list standard peer1-pre3 permit 100:5013
ip community-list standard peer2-noann permit 100:5020
ip community-list standard peer2-pre1 permit 100:5021
ip community-list standard peer2-pre2 permit 100:5022
ip community-list standard peer2-pre3 permit 100:5023
```

Don't announce anywhere

Single prepend to all

Don't announce to peer 1

Single prepend to peer 2

Creating route-maps – neighbour 1

```
route-map bgp-neighbor-01 deny 10
  match ip community all-noann peer1-noann
!
route-map bgp-neighbor-01 permit 20
  match ip community all-pre1 peer1-pre1
  set as-path prepend 100
!
route-map bgp-neighbor-01 permit 30
  match ip community all-pre2 peer1-pre2
  set as-path prepend 100 100
!
route-map bgp-neighbor-01 permit 40
  match ip community all-pre3 peer1-pre3
  set as-path prepend 100 100 100
!
route-map bgp-neighbor-01 permit 50
```

Don't announce these prefixes to neighbour 01

Single prepend of these prefixes to neighbour 01

Double prepend of these prefixes to neighbour 01

Triple prepend of these prefixes to neighbour 01

All other prefixes remain untouched

Creating route-maps – neighbour 2

```
route-map bgp-neigh-02 deny 10
  match ip community all-noann peer2-noann
!
route-map bgp-neigh-02 permit 20
  match ip community all-pre1 peer2-pre1
  set as-path prepend 100
!
route-map bgp-neigh-02 permit 30
  match ip community all-pre2 peer2-pre2
  set as-path prepend 100 100
!
route-map bgp-neigh-02 permit 40
  match ip community all-pre3 peer2-pre3
  set as-path prepend 100 100 100
!
route-map bgp-neigh-02 permit 50
```

Don't announce these prefixes to neighbour 02

Single prepend of these prefixes to neighbour 02

Double prepend of these prefixes to neighbour 02

Triple prepend of these prefixes to neighbour 02

All other prefixes remain untouched

Operator BGP configuration

```
router bgp 100
  address-family ipv4
    neighbor 100.67.3.2 remote-as 200
    neighbor 100.67.3.2 route-map bgp-neigh-01 out
    neighbor 100.67.3.2 route-map policy-01 in
    neighbor 100.67.3.2 activate
    neighbor 100.67.3.6 remote-as 300
    neighbor 100.67.3.6 route-map bgp-neigh-02 out
    neighbor 100.67.3.6 route-map policy-02 in
    neighbor 100.67.3.6 activate
```

- ❑ The route-maps are then applied to the appropriate neighbour
- ❑ As long as the customer sets the appropriate communities, the policy will be applied to their prefixes

Customer BGP configuration

```
router bgp 600
  address-family ipv4
    neighbor 100.69.1.1 remote-as 100
    neighbor 100.69.1.1 route-map upstream out
    neighbor 100.69.1.1 prefix-list default in
    neighbor 100.69.1.1 activate
  !
  route-map upstream permit 10
    match ip address prefix-list blockA
    set community 100:5010 100:5023
  route-map upstream permit 20
    match ip address prefix-list aggregate
```

- This will:
 - 3x prepend of blockA towards their upstream's 2nd BGP neighbour
 - Not announce blockA towards their upstream's 1st BGP neighbour
 - Let the aggregate through with no specific policy



Customer Policy Control

- ❑ Notice how much flexibility a BGP customer could have with this type of policy implementation
- ❑ Advantages:
 - Customer has flexibility
 - Operator Technical Support does not need to be involved
- ❑ Disadvantages
 - Customer could upset the operator's loadbalancing tuning
- ❑ Advice
 - This kind of policy control is very useful, but should only be considered if appropriate for the circumstances

Conclusion



Communities

- ❑ Communities are fun! 😊
- ❑ And they are extremely powerful tools
- ❑ Think about community policies, e.g. like the additions described here
- ❑ Supporting extensive community usage makes customer configuration easy
- ❑ Watch out for routing loops!

Using BGP Communities



ISP Workshops