# **BGP Best Current Practices**

### **ISP** Workshops



These materials are licensed under the Creative Commons Attribution-NonCommercial 4.0 International license (http://creativecommons.org/licenses/by-nc/4.0/)

Last updated 25<sup>th</sup> October 2021


## Acknowledgements

- This material originated from the Cisco ISP/IXP Workshop Programme developed by Philip Smith & Barry Greene
- Use of these materials is encouraged as long as the source is fully acknowledged and this notice remains in place
- Bug fixes and improvements are welcomed
  - Please email workshop (at) bgp4all.com

Philip Smith

### **BGP** Videos

- NSRC has made a video recording of this presentation, as part of a library of BGP videos for the whole community to use:
  - https://learn.nsrc.org/bgp#bgp\_best\_practices

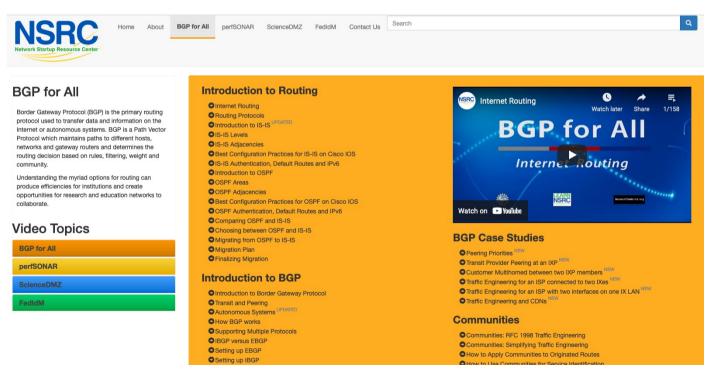


# Configuring BGP

Where do we start?

## Cisco IOS Good Practices

ISPs should start off with the following BGP commands as a basic template:

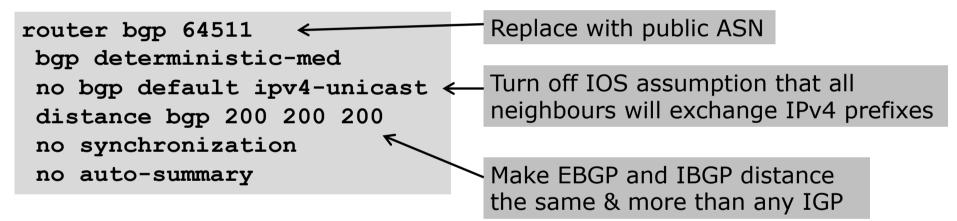

### EBGP Default Behaviour

#### Industry standard is described in RFC8212

- https://tools.ietf.org/html/rfc8212
- External BGP (EBGP) Route Propagation Behaviour without Policies

### NB: BGP in Cisco IOS is permissive by default

This is contrary to industry standard and RFC8212

Configuring BGP peering without using filters means:

- All best paths on the local router are passed to the neighbour
- All routes announced by the neighbour are received by the local router
- Can have disastrous consequences (see RFC8212)

### EBGP Default Behaviour

Best practice is to ensure that each EBGP neighbour has inbound and outbound filter applied:

```
router bgp 64511
address-family ipv4
neighbor 100.64.0.1 remote-as 64510
neighbor 100.64.0.1 prefix-list as64510-in in
neighbor 100.64.0.1 prefix-list as64510-out out
neighbor 100.64.0.1 activate
```

## EBGP Default Behaviour

#### ■ FRR turns on RFC8212 support by default:

#### https://frrouting.org/

```
frr.pfs.lab(config)# router bgp 64512 view LAB
frr.pfs.lab(config-router)# bgp ?
<snip>
ebgp-requires-policy Require in and out policy for eBGP peers (RFC8212)
<snip>
```

No prefixes will be sent or received to external peers in the absence of inbound and outbound policy

# What is BGP for??

What is an IGP not for?

## BGP versus OSPF/ISIS

Internal Routing Protocols (IGPs)

- Examples are IS-IS and OSPF
- Used for carrying infrastructure addresses
- NOT used for carrying Internet prefixes or customer prefixes
- Design goal is to minimise number of prefixes in IGP to aid scalability and rapid convergence

## BGP versus OSPF/IS-IS

- BGP is used
  - Internally (IBGP)
  - Externally (EBGP)
- □ IBGP is used to carry:
  - Some/all Internet prefixes across backbone
  - Customer prefixes
- EBGP is used to:
  - Exchange prefixes with other ASes
  - Implement routing policy

## BGP versus OSPF/IS-IS

### DO NOT:

- Distribute BGP prefixes into an IGP
- Distribute IGP routes into BGP
- Use an IGP to carry customer prefixes

### **YOUR NETWORK WILL NOT SCALE**



## Aggregation

- Aggregation means announcing the address block received from the RIR to the other ASes connected to your network
- Subprefixes of this aggregate may be:
  - Used internally in the ISP network
  - Announced to other ASes to aid with multihoming
- Too many operators are still thinking about class Cs, resulting in a proliferation of /24s in the Internet routing table
  - October 2021: 506533 /24s in IPv4 table of 868499 prefixes
- □ The same is happening for /48s with IPv6
  - October 2021: 62628 /48s in IPv6 table of 133799 prefixes

## Configuring Aggregation – Cisco IOS

- ISP has 100.66.0.0/19 address block
- To put into BGP as an aggregate:

```
router bgp 64511
address-family ipv4
network 100.66.0.0 mask 255.255.224.0
ip route 100.66.0.0 255.255.224.0 null0
```

□ The static route is a "pull up" route

- More specific prefixes within this address block ensure connectivity to ISP's customers
- Longest match" lookup

# Aggregation

- Address block should be announced to the Internet as an aggregate
- Subprefixes of address block should NOT be announced to Internet unless for traffic engineering
  - See BGP Multihoming presentations
- Aggregate should be generated internally
  - Not on the network borders!

## Announcing Aggregate – Cisco IOS

#### Configuration Example

```
router bgp 64511
address-family ipv4
network 100.66.0.0 mask 255.255.224.0
neighbor 100.67.10.1 remote-as 101
neighbor 100.67.10.1 prefix-list out-filter out
neighbor 100.67.10.1 prefix-list default in
neighbor 100.67.10.1 activate
!
ip route 100.66.0.0 255.255.224.0 null0
!
ip prefix-list out-filter permit 100.66.0.0/19
ip prefix-list out-filter deny 0.0.0.0/0 le 32
!
ip prefix-list default permit 0.0.0.0/0
```


## Announcing an Aggregate

- ISPs who don't and won't aggregate are held in poor regard by community
- Registries publish their minimum allocation size
  - For IPv4:
    - □ /24
  - For IPv6:

48 for assignment, /32 for allocation

Until 2010, there was no real reason to see anything longer than a /22 IPv4 prefix on the Internet. But now?

IPv4 run-out is having an impact

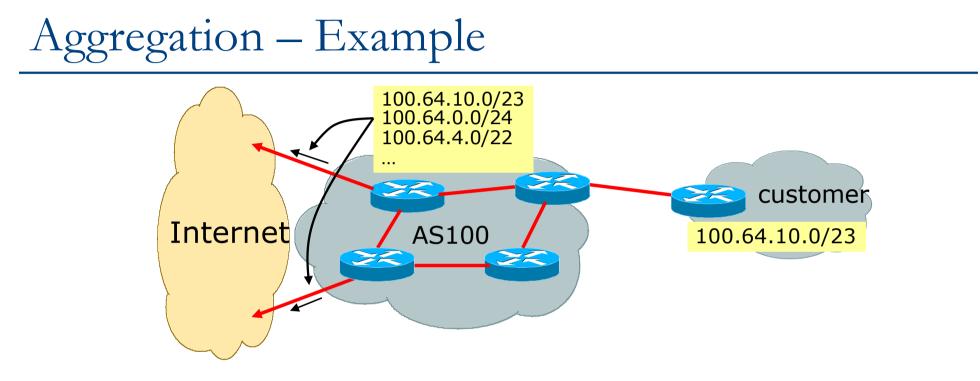

- Customer has /23 network assigned from AS100's /19 address block
- AS100 announces customers' individual networks to the Internet

## Aggregation – Bad Example


#### Customer link goes down

- Their /23 network becomes unreachable
- /23 is withdrawn from AS100's IBGP
- Their ISP doesn't aggregate its /19 network block
  - /23 network withdrawal announced to peers
  - Starts rippling through the Internet
  - Added load on all Internet backbone routers as network is removed from routing table

#### 🗕 Customer link returns

- Their /23 network is now visible to their ISP
- Their /23 network is re-advertised to peers
- Starts rippling through Internet
- Load on Internet backbone routers as network is reinserted into routing table
- Some ISP's suppress the flaps
- Internet may take 10-20 min or longer to be visible
- Where is the Quality of Service???

## Aggregation – Example

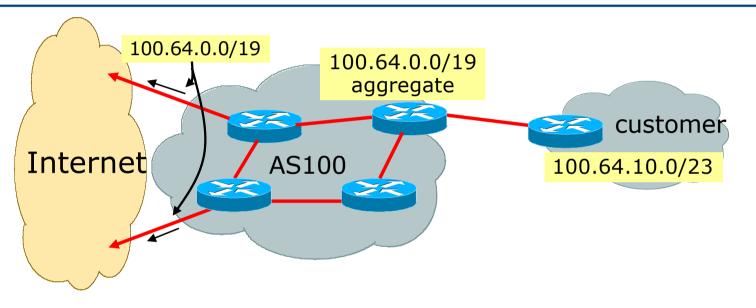

- Customer has /23 network assigned from AS100's /19 address block
- AS100 announced /19 aggregate to the Internet

## Aggregation – Good Example

#### Customer link goes down

- Their /23 network becomes unreachable
- /23 is withdrawn from AS100's IBGP
- /19 aggregate is still being announced
  - No BGP hold down problems
  - No BGP propagation delays
  - No damping by other ISPs —

- - Their /23 network is visible again
    - The /23 is re-injected into AS100's IBGP
  - The whole Internet becomes visible immediately
  - Customer has Quality of Service perception

## Aggregation – Summary

#### □ Good example is what everyone should do!

- Adds to Internet stability
- Reduces size of routing table
- Reduces routing churn
- Improves Internet QoS for everyone
- Bad example is what too many still do!
  - Why? Lack of knowledge?
  - Laziness?

## Separation of IBGP and EBGP

- Many ISPs do not understand the importance of separating IBGP and EBGP
  - IBGP is where all customer prefixes are carried
  - EBGP is used for announcing aggregate to Internet and for Traffic Engineering
- Do NOT do traffic engineering with customer originated IBGP prefixes
  - Leads to instability similar to that mentioned in the earlier bad example
  - Even though aggregate is announced, a flapping subprefix will lead to instability for the customer concerned

Generate traffic engineering prefixes on the Border Router

# The Internet Today (October 2021)

#### Current IPv4 Internet Routing Table Statistics

BGP Routing Table Entries	868499
Prefixes after maximum aggregation	329923
Unique prefixes in Internet	419756
/24s announced	506533
ASNs in use	72121

- (maximum aggregation is calculated by Origin AS)
- (unique prefixes > max aggregation means that operators are announcing aggregates from their blocks without a covering aggregate)

## Efforts to improve aggregation

#### □ The CIDR Report

- Initiated and operated for many years by Tony Bates
- Now combined with Geoff Huston's routing analysis
  - www.cidr-report.org
  - covers both IPv4 and IPv6 BGP tables)
- Results e-mailed on a weekly basis to most operations lists around the world
- Lists the top 30 service providers who could do better at aggregating
- RIPE Routing WG aggregation recommendations
  - IPv4: RIPE-399 www.ripe.net/ripe/docs/ripe-399.html
  - IPv6: RIPE-532 www.ripe.net/ripe/docs/ripe-532.html


# Efforts to Improve Aggregation The CIDR Report

- Also computes the size of the routing table assuming ISPs performed optimal aggregation
- Website allows searches and computations of aggregation to be made on a per AS basis
  - Flexible and powerful tool to aid ISPs
  - Intended to show how greater efficiency in terms of BGP table size can be obtained without loss of routing and policy information
  - Shows what forms of origin AS aggregation could be performed and the potential benefit of such actions to the total table size
  - Very effectively challenges the traffic engineering excuse

#### **Status Summary**

#### Table History


Date	Prefixes	CIDR Aggregated
18-10-21	898602	496196
19-10-21	898535	496201
20-10-21	897984	483474
21-10-21	899215	484272
22-10-21	899051	484837
23-10-21	899713	485141
24-10-21	899753	485867
25-10-21	900089	485932

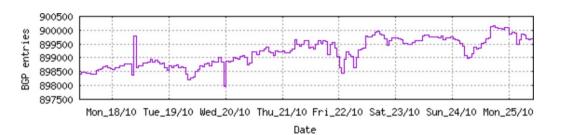

Plot: BGP Table Size

#### AS Summary

- 72368 Number of ASes in routing system
- 25298 Number of ASes announcing only one prefix
- <sup>8896</sup> Largest number of prefixes announced by an AS AS8151: Uninet S.A. de C.V., MX
- <sup>211326208</sup> Largest address span announced by an AS (/32s) AS749: DNIC-AS-00749, US

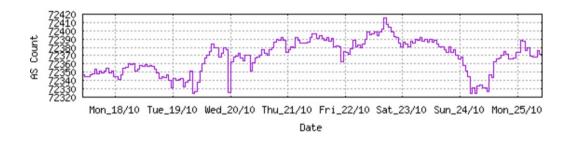

Plot: AS count

Plot: Average announcements per origin AS

Report: ASes ordered by originating address span

Report: ASes ordered by transit address span

Report: Autonomous System number-to-name mapping (from Registry WHOIS data)

RankASTypeOriginate Addr Space (pfx)Transit Addr space (pfx)Description74AS6389ORG+TRN Originate:9726464 /8.79Transit:60160 /16.12BELLSOUTH-NET-BLK, US

#### **Aggregation Suggestions**

Filter: Aggregates, Specifics

This report does not take into account conditions local to each origin AS in terms of policy or traffic engineering requirements, so this is an approximate guideline as to aggreg

Rank AS 84 <u>AS6389</u>	AS Name BELLSOUTH-NET-BLK, US	Current Wthdw Aggte 703 586 24	Annce Redctn 141 562	% 79.94%
Prefix 12.81.120.0/24 12.130.209.0/24	AS Path 4608 7575 2914 7018 6389 4608 7575 2914 7018 6389 6389 638	Aggregation Suggestion		Long term deaggregator – BellSouth in the US
65.4.0.0/14 65.5.64.0/22	4608 7575 2914 7018 6389 6389 638 4608 7575 2914 7018 6389 4608 7575 2914 7018 6389 - Withdu 4608 7575 2914 7018 6389 - Withdu	awn - matching aggregate 65.4.0.		
65.5.88.0/21 65.5.118.0/23 65.5.160.0/22	4608 7575 2914 7018 6389 - Withdi 4608 7575 2914 7018 6389 - Withdi 4608 7575 2914 7018 6389 - Withdi 4608 7575 2914 7018 6389 - Withdi	awn - matching aggregate 65.4.0. awn - matching aggregate 65.4.0.	0/14 4608 7575 0/14 4608 7575	5 2914 7018 6389 5 2914 7018 6389
65.5.164.0/22 65.5.172.0/22 65.5.200.0/21	4608 7575 2914 7018 6389 - Withdu 4608 7575 6461 7018 6389 4608 7575 2914 7018 6389 - Withdu	awn - matching aggregate 65.4.0.	0/14 4608 7575	5 2914 7018 6389
65.5.228.0/22 65.5.232.0/22 65.5.236.0/22	4608 7575 2914 7018 6389 - Withdu 4608 7575 6461 7018 6389 4608 7575 2914 7018 6389 - Withdu	rawn - matching aggregate 65.4.0.	0/14 4608 7575	5 2914 7018 6389
65.5.240.0/22 65.5.244.0/22 65.5.248.0/22 65.5.252.0/22	4608 7575 2914 7018 6389 - Withdu 4608 7575 2914 7018 6389 - Withdu 4608 7575 2914 7018 6389 - Withdu 4608 7575 2914 7018 6389 - Withdu	awn - matching aggregate 65.4.0. awn - matching aggregate 65.4.0.	0/14 4608 7575 0/14 4608 7575	5 2914 7018 6389 5 2914 7018 6389
65.6.192.0/22 65.6.196.0/22 65.7.64.0/18	4608 7575 2914 7018 6389 - Withd 4608 7575 2914 7018 6389 - Withd 4608 7575 2914 7018 6389 - Withd 4608 7575 2914 7018 6389	awn — matching aggregate 65.4.0.	0/14 4608 757	5 2914 7018 6389
65.7.116.0/22 65.7.116.0/24 65.7.117.0/24	4608 4826 3257 7018 6389 + Annour 4608 4826 3257 7018 6389 - Withd 4608 4826 3257 7018 6389 - Withd	awn — aggregated with 65.7.117.0	0/24 (4608 4826	

RankASTypeOriginate Addr Space (pfx)Transit Addr space (pfx)Description211AS18566ORIGIN Originate:2825216 /10.57Transit:0 /0.00MEGAPATH5-, US

#### **Aggregation Suggestions**

Filter: Aggregates, Specifics

## Long term deaggregator – Megapath in the US

This report does not take into account conditions local to each origin AS in terms of policy or traffic engineering requirements, so this is an approximate guideline as to aggreg

Rank AS 25 <u>AS18566</u>	AS Name MEGAPATH5-, US	Current 1963	Wthdw Aggt 1619 12			% 76.36%			
25 <u>A310500</u>	HEGALATIS, 05	1905	1015 12	0 -0-	1455	/01000			
Prefix	AS Path	Aggregation S	Suggestion						
64.6.160.0/23	4608 4826 3257 18566								
64.6.164.0/22	4608 4826 3257 18566 + Anno	ounce - aggregate of 64.	6.164.0/23 (	4608 482	6 3257 1	L8566) and	64.6.166.0/23	(4608 4826	3257 18
64.6.164.0/23	4608 4826 3257 18566 - With						· · · · · · · · · · · · · · · · · · ·		
64.6.166.0/24	4608 4826 3257 18566 – With								
64.6.167.0/24	4608 4826 3257 18566 - With								
64.50.206.0/23	4608 4826 3257 18566								
64.51.126.0/23	4608 4826 3257 18566								
64.81.0.0/16	4608 4826 3356 18566								
64.81.4.0/24	4608 4826 3257 18566								
64.81.16.0/20	4608 4826 3257 18566 + Anno	ounce - aggregate of 64.	81.16.0/21 (	4608 482	6 3257 1	L8566) and	64.81.24.0/21	(4608 4826	3257 18
64.81.16.0/22	4608 4826 3257 18566 - With								
64.81.20.0/22	4608 4826 3257 18566 – With	ndrawn – aggregated with	64.81.16.0/	22 (4608	4826 32	257 18566)			
64.81.22.0/24	4608 4826 3257 18566 – With	ndrawn — matching aggreg	ate 64.81.20	.0/22 46	08 4826	3257 1856	6		
64.81.24.0/22	4608 4826 3257 18566 – With	ndrawn – aggregated with	64.81.28.0/	22 (4608	4826 32	257 18566)			
64.81.28.0/22	4608 4826 3257 18566 – With								
64.81.32.0/19	4608 4826 3257 18566 + Anno						64.81.48.0/20	(4608 4826	3257 18
64.81.32.0/20	4608 4826 3257 18566 – With								
64.81.32.0/24	4608 4826 3257 18566 – With								
64.81.33.0/24	4608 4826 3257 18566 – With								
64.81.34.0/24	4608 4826 3257 18566 - With								
64.81.35.0/24	4608 4826 3257 18566 – With							30	
64.81.36.0/24	4608 4826 3257 18566 - With							50	
64.81.37.0/24	4608 4826 3257 18566 - With	5 55 5							
64.81.39.0/24	4608 4826 3257 18566 - With	ndrawn - matching aggreg	ate 64.81.32	.0/20 46	08 4826	3257 1856	5		

Rank AS Type Originate Addr Space (pfx) Transit Addr space (pfx) Description 141 AS7545 ORG+TRN Originate: 5187072 /9.69 Transit: 3157248 /10.41 TPG-INTERNET-AP TPG Telecom Limited, AU

#### **Aggregation Suggestions**

Filter: Aggregates, Specifics

This report does not take into account conditions local to each origin AS in terms of policy or traffic engineering requirements, so this is an approximate guideline as to aggregate

Rank AS 6 <u>AS7545</u>	AS Name TPG-INTERNET-AP TPG Tel	Current Wthdw Aggte Annce Redctn % Lecom Limited, AU 5832 4985 179 1026 4806 82.41%
Prefix 14.2.0.0/19 14.2.32.0/19	AS Path 4608 4739 7545 4608 7575 7545	Aggregation Suggestion Long term deaggregator – TPG in Australia
14.2.32.0/13 14.2.32.0/21 14.2.40.0/21 14.2.48.0/21 14.2.56.0/21	4608 7575 7545 4608 7575 7545 4608 7575 7545 4608 7575 7545 4608 7575 7545	- Withdrawn - matching aggregate 14.2.32.0/19 4608 7575 7545 - Withdrawn - matching aggregate 14.2.32.0/19 4608 7575 7545 - Withdrawn - matching aggregate 14.2.32.0/19 4608 7575 7545 - Withdrawn - matching aggregate 14.2.32.0/19 4608 7575 7545
14.2.64.0/18 14.2.64.0/19 14.2.96.0/19 14.2.128.0/18	4608 4739 7545 4608 4739 7545 4608 4739 7545 4608 4739 7545 4608 7575 7545	+ Announce - aggregate of 14.2.64.0/19 (4608 4739 7545) and 14.2.96.0/19 (4608 4739 7545) - Withdrawn - aggregated with 14.2.96.0/19 (4608 4739 7545) - Withdrawn - aggregated with 14.2.64.0/19 (4608 4739 7545)
14.2.192.0/20 14.200.0.0/14 14.200.0.0/24 14.200.1.0/24	4608 4739 7545 4608 7575 7545 4608 7575 7545 4608 7575 7545 4608 7575 7545	- Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545 - Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
14.200.2.0/24 14.200.3.0/24 14.200.4.0/24 14.200.5.0/24 14.200.6.0/24	4608 7575 7545 4608 7575 7545 4608 7575 7545 4608 7575 7545 4608 7575 7545 4608 7575 7545	<ul> <li>Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545</li> </ul>
14.200.7.0/24 14.200.8.0/24 14.200.9.0/24 14.200.10.0/24 14.200.11.0/24	4608 7575 7545 4608 7575 7545 4608 7575 7545 4608 7575 7545 4608 7575 7545 4608 7575 7545	- Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545 - Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545

RankASTypeOriginate Addr Space (pfx)Transit Addr space (pfx)Description54AS12479ORG+TRN Originate:14209792 /8.24Transit:282112 /13.89UNI2-AS, ES

#### **Aggregation Suggestions**

Filter: Aggregates, Specifics

#### Long term deaggregator – Orange in Spain

This report does not take into account conditions local to each origin AS in terms of policy or traffic engineering requirements, so this is an approximate guideline as to aggregate

Rank AS 4 AS12479	AS Name UNI2-AS, ES		Current Wthdw 6864 6410	Aggte Annce 75 529	Redctn % 6335 92.29%
4 <u>A312473</u>	UN12-A5, L5		0004 0410	75 529	0555 52.25%
Prefix	AS Path	Agara	action Suggesti	o.n.	
1.178.224.0/19	4608 4826 5512		gation Suggesti	UII	
			a aggregate 1 1	70 774 0/10 40	00 4026 FE11 12470
1.178.248.0/21		12479 - Withdrawn - matchir	ig aggregate 1.1	/0.224.0/19 40	008 4828 5511 12479
37.11.0.0/16	4608 4826 5513				
37.11.0.0/22	4608 7575 3350			11 0 0/10 1000	4000 5511 10470
37.11.4.0/22		12479 - Withdrawn - matchir			
37.11.8.0/22		12479 - Withdrawn - matchir			
37.11.12.0/22		12479 - Withdrawn - matchir			
37.11.16.0/22		12479 - Withdrawn - matchir			
37.11.20.0/22		12479 – Withdrawn – matchir			
37.11.24.0/22		12479 – Withdrawn – matchir			
37.11.28.0/22		12479 – Withdrawn – matchir			
37.11.32.0/22		12479 – Withdrawn – matchir			
37.11.36.0/22		12479 – Withdrawn – matchir			
37.11.40.0/22	4608 4826 5513	12479 - Withdrawn - matchir	ng aggregate 37.	11.0.0/16 4608	8 4826 5511 12479
37.11.44.0/22	4608 4826 5513	12479 - Withdrawn - matchir	ng aggregate 37.	11.0.0/16 4608	3 4826 5511 12479
37.11.48.0/22	4608 4826 5513	12479 - Withdrawn - matchir	ng aggregate 37.	11.0.0/16 4608	8 4826 5511 12479
37.11.52.0/22	4608 4826 5513	12479 - Withdrawn - matchir	ng aggregate 37.	11.0.0/16 4608	8 4826 5511 12479
37.11.56.0/22	4608 4826 5513	12479 - Withdrawn - matchir	ng aggregate 37.	11.0.0/16 4608	8 4826 5511 12479
37.11.60.0/22	4608 4826 5513	12479 - Withdrawn - matchir	ng aggregate 37.	11.0.0/16 4608	8 4826 5511 12479
37.11.68.0/22	4608 4826 5513	12479 - Withdrawn - matchir	ng aggregate 37.	11.0.0/16 4608	8 4826 5511 12479
37.11.72.0/22		12479 - Withdrawn - matchir			
37.11.76.0/22		12479 – Withdrawn – matchir			
37.11.80.0/22		12479 – Withdrawn – matchir			
37.11.84.0/22		12479 - Withdrawn - matchir			

32

# Importance of Aggregation

- Size of routing table
  - Router Memory is not so much of a problem as it was in the 1990s
  - Routers routinely carry over 2 million prefixes
- Convergence of the Routing System
  - This is a problem
  - Bigger table takes longer for CPU to process
  - BGP updates take longer to deal with
  - BGP Instability Report tracks routing system update activity
  - bgpupdates.potaroo.net/instability/bgpupd.html

#### The BGP Instability Report

#### 50 Most active ASes for the past 14 days

RANK	ASN	UPDs	%	Prefixes	UPDs/Prefix	AS NAME
1	64050	333079	2.54%	874	381.10	BCPL-SG BGPNET Global ASN, SG
2	8151	242971	1.86%	8932	27.20	Uninet S.A. de C.V., MX
3	16509	180063	1.38%	5880	30.62	AMAZON-02, US
4	7713	161053	1.23%	3526	45.68	TELKOMNET-AS-AP PT Telekomunikasi Indonesia, ID
5	38197	128878	0.98%	257	501.47	SUNHK-DATA-AS-AP Sun Network Hong Kong Limited - HongKong Backbone, HK
6	132839	118902	0.91%	404	294.31	POWERLINE-AS-AP POWER LINE DATACENTER, HK
7	5972	117090	0.89%	2170	53.96	DNIC-ASBLK-05800-06055, US
8	37133	102803	0.79%	72	1427.82	airtel-tz-as, TZ
9	174	90268	0.69%	3086	29.25	COGENT-174, US
10	58224	85515	0.65%	1701	50.27	TCI, IR
11	47331	82797	0.63%	8393	9.87	TTNET, TR
12	7155	80461	0.61%	3951	20.36	VIASAT-SP-BACKBONE, US
13	9829	76048	0.58%	1863	40.82	BSNL-NIB National Internet Backbone, IN
14	7552	70613	0.54%	3627	19.47	VIETEL-AS-AP Viettel Group, VN
15	17794	66389	0.51%	14	4742.07	HTCL-ORANGE-HK-AP Hutchison Telephone Company Limited, HK
16	9583	66216	0.51%	1746	37.92	SIFY-AS-IN Sify Limited, IN
17	36903	62936	0.48%	1183	53.20	MT-MPLS, MA
18	27651	56173	0.43%	837	67.11	ENTEL CHILE S.A., CL
19	42337	52155	0.40%	412	126.59	RESPINA-AS, IR
20	8551	49632	0.38%	3446	14.40	BEZEQ-INTERNATIONAL-AS Bezeqint Internet Backbone, IL
21	13188	49254	0.38%	1611	30.57	TRIOLAN, UA
22	9919	46780	0.36%	738	63.39	NCIC-TW New Century InfoComm Tech Co., Ltd., TW
23	4780	45130	0.34%	716	63.03	SEEDNET Digital United Inc., TW
24	47730	44669	0.34%	2	22334.50	JEANDELESTRE, FR
25	9785	44398	0.34%	77	576.60	JASATELNET-AS-ID PT Berca Hardayaperkasa, ID
26	27871	44177	0.34%	10	4417.70	Telecom Argentina S.A., AR
27	24835	42970	0.33%	1571	27.35	RAYA-AS, EG

#### 50 Most active Prefixes for the past 14 days

RANK	PREFIX	UPDs	%	Origin AS AS NAME	
1	103.79.118.0/24	37670	0.28%	135490 BAL-AS-AP Business Automation Ltd., BD	
2	197.186.0.0/15	36184	0.27%	37133 airtel-tz-as, TZ	
3	145.236.90.0/24	35021	0.26%	5483 MAGYAR-TELEKOM-MAIN-AS Magyar Telekom Nyrt., HU	
4	196.46.120.0/23	33120	0.25%	37133 airtel-tz-as, TZ	
5	41.75.208.0/20	33012	0.25%	37133 airtel-tz-as, TZ	
6	67.211.53.0/24	29091	0.22%	26405 HDCS, US	
7	64.68.236.0/22	24129	0.18%	13904 COSLINK, US	
8	45.148.160.0/24	22758	0.17%	47730 JEANDELESTRE, FR	
9	203.145.78.0/24	22140	0.16%	17794 HTCL-ORANGE-HK-AP Hutchison Telephone Company Limited, HK	
10	203.145.74.0/24	22128	0.16%	17794 HTCL-ORANGE-HK-AP Hutchison Telephone Company Limited, HK	
11	202.45.88.0/24	22121	0.16%	17794 HTCL-ORANGE-HK-AP Hutchison Telephone Company Limited, HK	
12	45.148.160.0/22	21911	0.16%	47730 JEANDELESTRE, FR	
13	138.207.66.0/24	21084	0.16%	12025 IMDC-AS12025, US	
14	138.207.67.0/24	20966	0.16%	12025 IMDC-AS12025, US	
15	170.79.222.0/23	18766	0.14%	263864 CLIC RAPIDO TELECOMUNICACAO LTDA, BR	
16	41.242.72.0/24	15666	0.12%	37605 GTNL1-AS, NG	
17	200.110.229.0/24	15160	0.11%	27871 Telecom Argentina S.A., AR	
18	200.110.228.0/24	15155	0.11%	27871 Telecom Argentina S.A., AR	
19	209.22.66.0/24	14694	0.11%	2046 DNIC-AS-02046, US	
20	209.22.67.0/24	14692	0.11%	2046 DNIC-AS-02046, US	
21	141.98.139.0/24	14078	0.10%	211975 WOHLERT, DE	
22	131.0.4.0/22	13587	0.10%	61855 NOVA NET TECNOLOGIA LTDA - ME, BR	
23	216.194.128.0/21	13510	0.10%	27871 Telecom Argentina S.A., AR	
24	182.23.171.0/24	11550	0.09%	137346 CNI-AS-ID PT Cyber Network Indonesia, ID	
25	45.169.136.0/22	10593	0.08%	268117 RAFAEL FERNANDES DE MEDEIROS, BR	
26	200.36.204.0/24	9530	0.07%	271284 MP TELECOMUNICACOES EIRELI, BR	
27	130.137.78.0/24	9313	0.07%	16509 AMAZON-02, US	
28	130.137.79.0/24	9271	0.07%	16509 AMAZON-02, US	
29	130.137.108.0/24	9214	0.07%	16509 AMAZON-02, US	
30	130.137.140.0/24	9186	0.07%	16509 AMAZON-02, US	
31	130.137.90.0/24	9129	0.07%	16509 AMAZON-02, US	
32	130.137.89.0/24	9125	0.07%	14618 AMAZON-AES, US	

#### The BGP IPv6 Instability Report

#### 50 Most active ASes for the past 14 days

RANK	ASN	UPDs	%	Prefixes	UPDs/Prefix	AS NAME
1	<u>58336</u>	3387439	58.49%	304	11142.89	IXTS-AS, CN
2	<u>20473</u>	827896	14.30%	7040	117.60	AS-CHOOPA, US
3	<u>27951</u>	166087	2.87%	58	2863.57	Media Commerce Partners S.A, CO
4	<u>11172</u>	87338	1.51%	3385	25.80	Alestra, S. de R.L. de C.V., MX
5	12208	58796	1.02%	18	3266.44	TRUVISTA, US
6	<u>262983</u>	44153	0.76%	21	2102.52	Net Barretos Tecnologia LTDA - ME, BR
7	<u>15133</u>	42692	0.74%	404	105.67	EDGECAST, US
8	<u>31514</u>	39061	0.67%	2	19530.50	INF-NET-AS, RU
9	262742	38760	0.67%	14	2768.57	Fundacao Universidade Federal do ABC - UFABC, BR
10	136440	36871	0.64%	1	36871.00	SASPL-AS-AP Sungard Availability Services India Private Limited, IN
11	36223	31094	0.54%	9	3454.89	SPANISHFORK-COMMUNITY-NETWORK, US
12	22356	29089	0.50%	5	5817.80	Durand do Brasil Ltda, BR
13	<u>60982</u>	28978	0.50%	3	9659.33	WARPCON-AS, RO
14	208753	28765	0.50%	36	799.03	NETSIX, IT
15	<u>32629</u>	26283	0.45%	2	13141.50	<u>CITY-OF-CHARLOTTE-ASN, US</u>
16	<u>41495</u>	25697	0.44%	6	4282.83	FAELIX, GB
17	<u>267638</u>	25041	0.43%	1	25041.00	<u>Wind Telecomunicacao do Brasil Ltda - ME, BR</u>
18	<u>268976</u>	22973	0.40%	8	2871.62	Weclix Telecom SA, BR
19	262865	22026	0.38%	8	2753.25	Ired Internet, BR
20	<u>268275</u>	21742	0.38%	1	21742.00	GOOD TELECOM PROVEDOR DE INTERNET LTDA, BR
21	<u>61665</u>	20176	0.35%	8	2522.00	ROMICROS BRASIL LTDA, BR
22	12654	19265	0.33%	39	493.97	RIPE-NCC-RIS-AS Reseaux IP Europeens Network Coordination Centre RIPE NCC, NL
23	<u>52861</u>	19097	0.33%	7	2728.14	SN Internet Navegantes Ltda ME, BR
24	<u>52817</u>	18994	0.33%	9	2110.44	NEWCENTER TELECOM, BR
25	<u>28201</u>	18400	0.32%	7	2628.57	Companhia Itabirana Telecomunicacoes Ltda, BR
26	14840	17826	0.31%	24	742.75	BR Digital, BR
27	<u>269822</u>	17755	0.31%	6	2959.17	COLOMBIA MAS TV S.A.S, CO

#### 50 Most active Prefixes for the past 14 days

RANK	PREFIX	UPDs	%	Origin AS AS NAME
1	2400:dc40::/32	36871	0.55%	136440 SASPL-AS-AP Sungard Availability Services India Private Limited, IN
2	2801:17:4800::/48	27692	0.41%	27951 Media Commerce Partners S.A, CO
3	2620:0:2f0::/48	26280	0.39%	32629 CITY-OF-CHARLOTTE-ASN, US
4	2804:448c::/32	25041	0.37%	267638 Wind Telecomunicacao do Brasil Ltda - ME, BR
5	2804:4ea8::/32	21742	0.32%	268275 GOOD TELECOM PROVEDOR DE INTERNET LTDA, BR
6	2801:1b6::/44	21308	0.32%	27951 Media Commerce Partners S.A, CO
7	2801:174:3::/48	21287	0.32%	27951 Media Commerce Partners S.A, CO
8	<u>2801:172:2::/48</u>	21215	0.31%	27951 Media Commerce Partners S.A, CO
9	2a01:9e02::/32	19958	0.30%	<u>41495 FAELIX, GB</u>
10	2a05:3181::/32	19532	0.29%	<u> 31514 INF-NET-AS, RU</u>
11	2a05:3181:ffff::/48	19529	0.29%	<u> 31514 INF-NET-AS, RU</u>
12	2804:b:8000::/34	17495	0.26%	<u> 14840 BR Digital, BR</u>
13	<u>2801:186::/44</u>	16865	0.25%	27951 Media Commerce Partners S.A, CO
14	2405:4000:800:8::/64	14929	0.22%	38082 IIT-TIG-AS-AP True International Gateway Co., Ltd., TH
15	2a04:1bc3::/32	13858	0.21%	60982 WARPCON-AS, RO
16	2a04:1bc7::/32	13857	0.21%	60982 WARPCON-AS, RO
17	2a05:dfc7:44::/48	13691	0.20%	<u> 208753 NETSIX, IT</u>
18	2a05:dfc7:47::/48	13650	0.20%	<u> 208753 NETSIX, IT</u>
19	2a04:5b05::/32	13646	0.20%	<u> 203974 ADS, RO</u>
20	2a0e:b107:b85::/48	13474	0.20%	<u> 212995 TAN-NET, CH</u>
21	2a0f:9400:7409::/48	13272	0.20%	<u> 58336 IXTS-AS, CN</u>
22	2a0f:9400:743e::/48	13271	0.20%	<u>58336 IXTS-AS, CN</u>
23	2a0f:9400:744d::/48	13269	0.20%	<u> 58336 IXTS-AS, CN</u>
24	2a0f:9400:7408::/48	13268	0.20%	<u>58336 IXTS-AS, CN</u>
25	2a0f:9400:744c::/48	13264	0.20%	<u> 58336 IXTS-AS, CN</u>
26	2a0f:9400:7460::/48	13264	0.20%	<u> 58336 IXTS-AS, CN</u>
27	2a0f:9400:7442::/48	13263	0.20%	<u> 58336 IXTS-AS, CN</u>
28	2a0f:9400:7438::/48	13263	0.20%	<u> 58336 IXTS-AS, CN</u>
29	2a0f:9400:740d::/48	13262	0.20%	<u> 58336 IXTS-AS, CN</u>
30	2a0f:9400:7456::/48	13262	0.20%	<u> 58336 IXTS-AS, CN</u>
31	2a0f:9400:7465::/48	13260	0.20%	<u> 58336 IXTS-AS, CN</u>
32	2a0f:9400:7403::/48	13257	0.20%	58336 IXTS-AS, CN

# Receiving Prefixes

#### **Receiving Prefixes**

- There are three scenarios for receiving prefixes from other ASes
  - Customer talking BGP
  - Peer talking BGP
  - Upstream/Transit talking BGP
- Each has different filtering requirements and need to be considered separately

- ISPs should only accept prefixes which have been assigned or allocated to their downstream customer
- If ISP has assigned address space to its customer, then the customer IS entitled to announce it back to his ISP
- If the ISP has NOT assigned address space to its customer, then:
  - Check in the five RIR databases to see if this address space really has been assigned to the customer
  - The tool: whois -h jwhois.apnic.net x.x.x.0/24

jwhois is "joint whois" and queries all RIR databases)

Example use of whois to check if customer is entitled to announce address space:
inetnum – means it is an

address delegation to an entity

\$ whois -h jwhois.apnic.net 202.12.29.0

inetnum:	202.12.29.0 - 202.12.29.255		
netname:	APNIC-SERVICES-AU		
descr:	Asia Pacific Network Information Cent	re	
descr:	Regional Internet Registry for the As	ia-Pacific Region	
descr:	6 Cordelia Street		
descr:	South Brisbane		
geoloc:	27.4731138 153.0141194	Portable – means its an	
country:	AU	assignment to the customer, the	
admin-c:	AIC1-AP	customer can announce it to you	
tech-c:	AIC1-AP		
mnt-by:	APNIC-HM		
mnt-irt:	IRT-APNIC-IS-AP		
status:	ASSIGNED PORTABLE		
changed:	hm-changed@apnic.net 20170327		
changed:	hm-changed@apnic.net 20170331		
source:	APNIC		

Example use of whois to check if customer is entitled to announce address space:

inetnum: 194.15.141.0 - 194.15.141.255	
<pre>netname: INETTECH country: SE org: ORG-ITAS2-RIPE admin-c: KEL5-RIPE tech-c: KEL5-RIPE status: ASSIGNED PI mnt-by: RIPE-NCC-END-MNT mnt-by: KURTIS-PP-MNT mnt-routes: KURTIS-PP-MNT mnt-domains: KURTIS-PP-MNT created: 2003-12-04T09:33:09Z last-modified: 2016-04-14T08:21:55Z source: RIPE sponsoring-org: ORG-NIE1-RIPE</pre>	Assigned PI – means its an assignment to the customer, the customer can announce it to you

Example use of whois to check if customer is entitled to announce address space:

\$ whois -h jwho	ois.apmic.net 193.128.0.0/	22	address deleg		
<pre>inetnum: netname: country: org: admin-c: tech-c: status: remarks: mnt-by: mnt-by:</pre>	193.128.0.0 - 193.128.6. UK-PIPEX-19931014 GB ORG-UA24-RIPE WERT1-RIPE UPHM1-RIPE ALLOCATED PA Please send abuse notifi RIPE-NCC-HM-MNT AS1849-MNT		se@uk.uu.net		
<pre>mnt-routes: mnt-routes: mnt-irt: created: last-modified: source:</pre>	AS1849-MNT WCOM-EMEA-RICE-MNT IRT-MCI-GB 2018-07-30T09:42:04Z 2018-07-30T09:42:04Z RIPE # Filtered	Provider Age space and c by the ISP h	<ul> <li>means that gregatable add an only be ann olding the allo verizon UK)</li> </ul>	lress nounced	

## Receiving Prefixes from customer: Cisco IOS

■ For Example:

- Downstream has 100.69.0.0/20 block
- Should only announce this to upstreams
- Upstreams should only accept this from them
- Configuration on upstream

```
router bgp 100
address-family ipv4
neighbor 100.67.10.1 remote-as 101
neighbor 100.67.10.1 prefix-list customer in
neighbor 100.67.10.1 prefix-list default out
neighbor 100.67.10.1 activate
!
ip prefix-list customer permit 100.69.0.0/20
!
ip prefix-list default permit 0.0.0.0/0
```

## Receiving Prefixes: From Peers

- A peer is an ISP with whom you agree to exchange prefixes you originate into the Internet routing table
  - Prefixes you accept from a peer are only those they have indicated they will announce
  - Prefixes you announce to your peer are only those you have indicated you will announce

## Receiving Prefixes: From Peers

Agreeing what each will announce to the other:

 Exchange of e-mail documentation as part of the peering agreement, and then ongoing updates

#### OR

- Use of the Internet Routing Registry and configuration tools such as:
  - IRRToolSet:

https://github.com/irrtoolset/irrtoolset

#### ■ bgpq3:

https://github.com/snar/bgpq3

## Receiving Prefixes from peer: Cisco IOS

- For Example:
  - Peer has 220.50.0.0/16, 61.237.64.0/18 and 81.250.128.0/17 address blocks
- Configuration on local router

```
router bgp 100
address-family ipv4
neighbor 100.67.10.1 remote-as 101
neighbor 100.67.10.1 prefix-list my-peer in
neighbor 100.67.10.1 prefix-list my-prefix out
neighbor 100.67.10.1 activate
!
ip prefix-list my-peer permit 220.50.0.0/16
ip prefix-list my-peer permit 61.237.64.0/18
ip prefix-list my-peer permit 81.250.128.0/17
ip prefix-list my-peer deny 0.0.0.0/0 le 32
!
ip prefix-list my-prefix permit 100.67.16.0/20
```

- Upstream/Transit Provider is an ISP who you pay to give you transit to the WHOLE Internet
- Receiving prefixes from them is not desirable unless really necessary
  - Traffic Engineering see BGP Multihoming presentations
- Ask upstream/transit provider to either:
  - originate a default-route

#### OR

announce one prefix you can use as default

#### Downstream Router Configuration

```
router bgp 100
address-family ipv4
network 100.66.0.0 mask 255.255.224.0
neighbor 100.65.7.1 remote-as 101
neighbor 100.65.7.1 prefix-list infilter in
neighbor 100.65.7.1 prefix-list outfilter out
neighbor 100.65.7.1 activate
!
ip prefix-list infilter permit 0.0.0.0/0
!
ip prefix-list outfilter permit 100.66.0.0/19
```

#### Upstream Router Configuration

```
router bgp 101
address-family ipv4
neighbor 100.65.7.2 remote-as 100
neighbor 100.65.7.2 default-originate
neighbor 100.65.7.2 prefix-list cust-in in
neighbor 100.65.7.2 prefix-list cust-out out
neighbor 100.65.7.2 activate
!
ip prefix-list cust-in permit 100.66.0.0/19
!
ip prefix-list cust-out permit 0.0.0.0/0
```

- If it is necessary to receive prefixes from any provider, care is required.
  - Don't accept default (unless you need it)
  - Don't accept your own prefixes
- Special use prefixes for IPv4 and IPv6:
  - http://www.rfc-editor.org/rfc/rfc6890.txt

■ For IPv4:

- Don't accept prefixes longer than /24 (?)
  - /24 was the historical class C

□ For IPv6:

- Don't accept prefixes longer than /48 (?)
  - 48 is the design minimum delegated to a site

- Check Team Cymru's list of "bogons"
  - http://www.team-cymru.com/bogon-reference.html
- For IPv4 also consult:
  - https://www.rfc-editor.org/rfc/rfc6441.txt (BCP171)
- Bogon Route Server:
  - https://www.team-cymru.com/bogon-reference-bgp.html
  - Supplies a BGP feed (IPv4 and/or IPv6) of address blocks which should not appear in the BGP table

#### Receiving IPv4 Prefixes

```
router bop 100
 network 101.10.0.0 mask 255.255.224.0
neighbor 100.65.7.1 remote-as 101
neighbor 100.65.7.1 prefix-list in-filter in
ip prefix-list in-filter deny 0.0.0.0/0
ip prefix-list in-filter deny 0.0.0.0/8 le 32
ip prefix-list in-filter deny 10.0.0.0/8 le 32
ip prefix-list in-filter denv 100.64.0.0/10 le 32
ip prefix-list in-filter deny 101.10.0.0/19 le 32
ip prefix-list in-filter deny 127.0.0.0/8 le 32
ip prefix-list in-filter deny 169.254.0.0/16 le 32
ip prefix-list in-filter deny 172.16.0.0/12 le 32
ip prefix-list in-filter deny 192.0.0.0/24 le 32
ip prefix-list in-filter deny 192.0.2.0/24 le 32
ip prefix-list in-filter deny 192.168.0.0/16 le 32
ip prefix-list in-filter deny 198.18.0.0/15 le 32
ip prefix-list in-filter deny 198.51.100.0/24 le 32 ! TEST2
ip prefix-list in-filter deny 203.0.113.0/24 le 32
ip prefix-list in-filter deny 224.0.0.0/3 le 32
ip prefix-list in-filter deny 0.0.0.0/0 ge 25
ip prefix-list in-filter permit 0.0.0.0/0 le 32
```

```
! Default
! RFC1122 local host
! RFC1918
! RFC6598 shared address
! Local prefix
! Loopback
! Auto-config
! RFC1918
! RFC1918
! RFC6598 IETF protocol
! TEST1
! RFC1918
! Benchmarking
! TEST2
! TEST3
! Multicast & Experimental
! Prefixes >/24
```

#### Receiving IPv6 Prefixes

```
router bgp 100
network 2020:3030::/32
neighbor 2020:3030::1 remote-as 101
neighbor 2020:3030::1 prefix-list v6in-filter in
1
ipv6 prefix-list v6in-filter permit 64:ff9b::/96
                                                           ! RFC6052 v4v6trans
ipv6 prefix-list v6in-filter deny 2001::/23 le 128
                                                           ! RFC2928 IETF prot
ipv6 prefix-list v6in-filter deny 2001:2::/48 le 128
                                                           ! Benchmarking
ipv6 prefix-list v6in-filter deny 2001:10::/28 le 128
                                                           ! ORCHID
ipv6 prefix-list v6in-filter deny 2001:db8::/32 le 128
                                                           ! Documentation
ipv6 prefix-list v6in-filter deny 2002::/16 le 128
                                                           ! Deny all 6to4
ipv6 prefix-list v6in-filter deny 2020:3030::/32 le 128
                                                           ! Local Prefix
ipv6 prefix-list v6in-filter deny 3ffe::/16 le 128
                                                           ! Formerly 6bone
ipv6 prefix-list v6in-filter permit 2000::/3 le 48
                                                           ! Global Unicast
ipv6 prefix-list v6in-filter deny ::/0 le 128
```

**Note**: These filters block Teredo (serious security risk) and 6to4 (deprecated by RFC7526)

#### **Receiving Prefixes**

- Paying attention to prefixes received from customers, peers and transit providers assists with:
  - The integrity of the local network
  - The integrity of the Internet
- Responsibility of all ISPs to be good Internet citizens

# Prefixes into IBGP

## Injecting prefixes into IBGP

- Use IBGP to carry customer prefixes
  - Don't use IGP
- Point static route to customer interface
- Use BGP network statement
- As long as static route exists (interface active), prefix will be in BGP

### Router Configuration: network statement

#### Example:

```
interface loopback 0
ip address 100.64.3.1 255.255.255.255
!
interface Serial 5/0
ip unnumbered loopback 0
ip verify unicast reverse-path
!
ip route 100.71.10.0 255.255.252.0 Serial 5/0
!
router bgp 100
address-family ipv4
network 100.71.10.0 mask 255.255.252.0
!
```

#### Injecting prefixes into IBGP

- Interface flap will result in prefix withdraw and reannounce
  - USe "ip route . . . permanent"
- Many ISPs redistribute static routes into BGP rather than using the network statement
  - Only do this if you understand why

### Router Configuration: redistribute static

#### Example:

```
ip route 100.71.10.0 255.255.252.0 Serial 5/0
!
router bgp 100
address-family ipv4
redistribute static route-map static-to-bgp
<snip>
!
route-map static-to-bgp permit 10
match ip address prefix-list ISP-block
set origin igp
set community 100:1000
<snip>
!
ip prefix-list ISP-block permit 100.71.10.0/22 le 30
```

### Injecting prefixes into IBGP

#### Route-map static-to-bgp can be used for many things:

- Setting communities and other attributes
- Setting origin code to IGP, etc

#### Be careful with prefix-lists and route-maps

 Absence of either/both means all statically routed prefixes go into IBGP

#### Summary

- Best Practices Covered:
  - When to use BGP
  - When to use ISIS/OSPF
  - Aggregation
  - Receiving Prefixes
  - Prefixes into BGP

# Interconnection Best Practices

#### PeeringDB and the Internet Routing Registry

#### Interconnection Best Practices

Types of Peering
Using the PeeringDB and IXPDB
Using the Internet Routing Registry

# Types of Peering (1)

#### Private Peering

 Where two network operators agree to interconnect their networks, and exchange their respective routes, for the purpose of ensuring their customers can reach each other directly over the peering link

#### Settlement Free Peering

- No traffic charges
- The most common form of peering
- Paid Peering
  - Where two operators agree to exchange traffic charges for a peering relationship

## Types of Peering (2)

- Bi-lateral Peering
  - Very similar to Private Peering, but usually takes place at a public peering point (IXP)
- Multilateral Peering
  - Takes place at Internet Exchange Points, where operators all peer with each other via a Route Server
- Mandatory Multilateral Peering
  - Where operators are forced to peer with each other as condition of IXP membership
  - Strongly discouraged: Has no record of success

## Types of Peering (3)

- Open Peering
  - Where an ISP publicly states that they will peer with all parties who approach them for peering
  - Commonly found at IXPs where ISP participates via the Route Server
- Selective Peering
  - Where an ISP's peering policy depends on the nature of the operator who requests peering with them
  - At IXPs, operator will not peer with RS but will only peer bilaterally
- Restrictive Peering
  - Where an ISP decides who its peering partners are, and is generally not approachable to considering peering opportunities

## Types of Peering (4)

- The Peering Database documents ISPs peering policies
  - https://www.peeringdb.com
- All AS operators should register in the PeeringDB
  - All operators who are considering peering or are peering must be in the PeeringDB to enhance their peering opportunities
- Participation in peering fora is encouraged too
  - Global Peering Forum (GPF) (for North American peering)
  - Regional Peering Fora (European, Middle Eastern, Asian, Caribbean, Latin American)
  - Many countries now have their own Peering Fora

### Types of Peering (5)

- The IXPDB documents IXPs and their participants around the world
  - https://ixpdb.euro-ix.net/en/
- All Internet Exchange Point operators should register their IXP in the database
  - IXPs using IXP Manager will have this happen as part of the IXP Manager set up
  - Provides the LAN IP addresses of each member to facilitate automation



69



Search here for a network, IX, or facility.

Advanced Search

#### pfsinoz

#### HKIX

Organization	Hong Kong Internet eXchange Limited
Long Name	Hong Kong Internet Exchange
City	Hong Kong
Country	нк
Continental Region	Asia Pacific
Media Type	Ethernet
Protocols Supported	⊘ Unicast IPv4 ○ Multicast ⊘ IPv6
Notes 😯	

#### **Contact Information**

Company Website	https://www.hkix.net/
Traffic Stats Website	https://www.hkix.net/hkix/stat/aggt/hkix-aggregate.html
Technical Email	noc@hkix.net
Technical Phone	+85239439900
Policy Email	info@hkix.net
Policy Phone	+85239438800

#### LAN

МТU	1500
DOT1Q	0
IPv6	2001:7fa:0:1::/64
IPv4	123.255.88.0/21

#### Local Facilities

Filter

Facility <del>▼</del>	Country	City
<u>CUHK</u>	Hong Kong	Hong Kong
MEGA Two (iAdvantage Hong Kong)	Hong Kong	Hong Kong
<u>MEGA-i (iAdvantage Hong Kong)</u>	Hong Kong	Hong Kong

Peers at this Exchange Poi	Filter	
Peer Name <del>▼</del>	IPv4	Speed
ASN	IPv6	Policy
ASGCNET HKIX Peering LAN	123.255.91.53	10G
24167	2001:7fa:0:1::ca28:a	135 Open
Asia Pacific Telecom HKIX Peering	123.255.91.86	10G
LAN 17709	2001:7fa:0:1::ca28:a	156 Open
ASLINE HKIX Peering LAN	123.255.92.13	10G
18013	2001:7fa:0:1::ca28:a2	20d Open
AT&T AP - AS2687 HKIX Peering	123.255.91.46	10G
LAN 2687	2001:7fa:0:1::ca28:a	
Automattic HKIX Peering LAN	123.255.90.71	10G
2635	2001:7fa:0:1::ca28:a0	047 Open
Badoo Ltd HKIX Peering LAN	123.255.90.220	2G
12678	None	Open
Baidu HKIX Peering LAN	123.255.90.131	10G
55967 Baidu HKIX Peering LAN	2001:7fa:0:1::ca28:a0 123.255.91.61	10G
55967 Bayan Telecommunications Inc. HKIX Peering LAN 6648	2001:7fa:0:1::ca28:a 123.255.91.45 2001:7fa:0:1::ca28:a	3G
BGP Network Limited HKIX Peering LAN 64050	123.255.91.177 2001:7fa:0:1::ca28:a	100G Ib1 Open
BIGHUB-ISP HKIX Peering LAN	123.255.90.207	1G
137989	2001:7fa:0:1::ca28:a0	Dof Open
BIGHUB-ISP HKIX Peering LAN	123.255.91.98	10G



Search here for a network, IX, or facility.

pfsinoz

Filter

Advanced Search

#### Amazon.com Diamond Sponsor

Organization	Amazon.com	Public Peering Exchange Points
Also Known As	Amazon Web Services	
Company Website	http://www.amazon.com	Exchange ▼ ASN
Primary ASN	16509	
IRR as-set/route-set ?	AS-AMAZON	<u>AMS-IX</u> 16509
Route Server URL		AMS-IX
Looking Glass URL		16509
		AMS-IX Chicago
Network Type	Enterprise	16509
IPv4 Prefixes 🕄	5000	AMS-IX Hong Kong
IPv6 Prefixes	2000	16509
Traffic Levels	Not Disclosed	AMS-IX India
Traffic Ratios	Balanced	16509
Geographic Scope	Global	AMS-IX India
Protocols Supported	⊘ Unicast IPv4 ○ Multicast ⊘ IPv6 ○ Never via route servers	16509
Last Updated	2019-12-29T14:56:38Z	BBIX Osaka
		16509
Notes ?	If you have a connectivity issue to Amazon then please visit:	BBIX Tokyo 16509
		BBIX Tokyo
	<ul> <li>IPv4: http://ec2-reachability.amazonaws.com/</li> <li>IPv6: http://ipv6.ec2-reachability.amazonaws.com/</li> </ul>	16509
		BCIX BCIX Peering LAN
	And include detail on prefixes you think you have a problem with if you contact our Ops alias. This will reduce	16509
	time with troubleshooting.	BIX.BG Main
	The following Amazon US locations and associated IX's	16509
	carry routes/traffic specific only to the services with	BNIX
	infrastructure in that metro. For example, Jacksonville is CloudFront only, whereas Ashburn is CloudFront, EC2, S3, etc.)	Private Peering Facilities
	. ,	Facility <b>▼</b>
	Seattle     Palo Alto	ASN
	San Jose	151 Front Street West Toronto
	Los Angeles	16509

•	Dal	las
---	-----	-----

Exchange 🔻 IPv4 Speed ASN IPv6 **RS** Peer AMS-IX 80.249.210.100 400G 16509 2001:7f8:1::a501:6509:1 0 AMS-IX 80.249.210.217 400G 16509 2001:7f8:1::a501:6509:2 0 AMS-IX Chicago 206.108.115.36 100G 16509 2001:504:38:1:0:a501:65 0 09:1 100G AMS-IX Hong Kong 103.247.139.10 16509 2001:df0:296::a501:6509: 0 1 AMS-IX India 223.31.200.29 10G 2001:e48:44:100b:0:a501 16509 0 :6509:2 AMS-IX India 10G 223.31.200.30 16509 2001:e48:44:100b:0:a501 0 :6509:1 BBIX Osaka 40G 218.100.9.24 16509 2001:de8:c:2:0:1:6509:1 0 BBIX Tokyo 218.100.6.52 200G 16509 2001:de8:c::1:6509:1 0 BBIX Tokyo 218.100.6.207 200G 16509 2001:de8:c::1:6509:2 0 BCIX BCIX Peering LAN 193.178.185.95 200G 16509 2001:7f8:19:1::407d:1 0 BIX.BG Main 193.169.198.87 100G 16509 2001:7f8:58::407d:0:1 0 RNIX 194 53 172 122 100G **Private Peering Facilities** Filter Facility 🔻 Country ASN City 151 Front Street West Toronto Canada 16509 Toronto OF Jahr Otra at / OFO Frank Otra at Minak Onend



Search here for a network, IX, or facility.

Advanced Search

#### Telia Carrier

Organization	Telia Group
Also Known As	TeliaSonera, Telia, TSIC
Company Website	http://www.teliacarrier.com/
Primary ASN	1299
IRR as-set/route-set 3	RIPE::AS-TELIANET RIPE::AS-TELIANET-V6
Route Server URL	
Looking Glass URL	https://lg.telia.net/
Network Type	NSP
IPv4 Prefixes	426000
IPv6 Prefixes 😧	40000
Traffic Levels	1 Tbps+
Traffic Ratios	Balanced
Geographic Scope	Global
Protocols Supported	⊘ Unicast IPv4 ○ Multicast ⊘ IPv6 ○ Never via route servers
Last Updated	2020-02-05T11:43:25Z
Notes	IPv4 + IPv6 Prefixes above would be actuals, not proposed max- prefix values.
	AS1299 is matching RPKI validation state and reject invalid prefixes from peers and customers. Our looking- glass marks validation state for all prefixes. Please review your registered ROAs to reduce number of invalid prefixes.
	All trouble ticket requests or support related emails should be sent to carrier-csc@teliacompany.com.

#### Peering Policy Information

Peering Policy	https://www.teliacarrier.com/dam/jcr:d1e83942-3db1-4334- a5f8- 431578633d26/Telia_Carrier_Global_Peering_Policy.pdf
General Policy	Restrictive

Public Peering Exchange Points	Filter		
Exchange <del>▼</del> ASN	IPv4 IPv6	Speed RS Peer	
No filter matches. You may filter by <b>Exchange</b> , <b>ASN</b> or <b>Speed.</b>			
Private Peering Facilities	Filter		
Facility <b>▼</b> ASN	Country City		
<u>365 Data Centers Buffalo (BU1)</u>	United States of Americ	а	
1299	Buffalo		
<u>365 Data Centers Detroit (DT1)</u>	United States of Americ	а	
1299	Southfield		
<u>365 Data Centers Nashville (NA1)</u>	United States of Americ	а	
1299	Nashville		
<u>365 Data Centers Tampa (TA1)</u>	United States of Americ	а	
1299	Tampa		
<u>3U Rechenzentrum Berlin</u>	Germany		
1299	Berlin Croatia		
<u>Altus IT</u> 1299			
	Zagreb Russia		
Borovaya 57 1299	St. Petersburg		
CE Colo Prague	Czechia		
1299	Prague		
CINECA - DC NaMeX	Italy		
1299	Roma		
COD BM-18	Russia		
1299	St.Petersburg		
Caldera21	Italy		
1299	Milan		
CarrierColo Berlin Luetzow (I/P/B/ site B)	Germany		
1299	Berlin		
Cologix MTL3	Canada		
1299	Montreal Screensh	ot	
Oslavia TOD4	Quanda		

<u>\_\_\_\_</u>



### Internet Routing Registry

- Many major transit providers and several content providers pay attention to what is contained in the Internet Routing Registry
  - There are many IRRs operating, the most commonly used being those hosted by the Regional Internet Registries, RADB, and some transit providers
- Best practice for any AS holder is to document their routing policy in the IRR
  - A route-object is the absolute minimum requirement

### Internet Routing Registry

- IRR objects can be created via the database webinterfaces or submitted via email
- Policy language used to be known as RPSL
- Problems:
  - IRR contains a lot of outdated information
  - Network operators not following best practices
- Some network operators now using RPKI and ROAs to securely indicate the origin AS of their routes
  - Takes priority over IRR entries
  - RPKI and ROAs covered in other presentations

### Internet Routing Registry

Which IRR database to use?

- Members of a Regional Internet Registry are recommended to use their RIR's Internet Routing Registry instance
  - Usually managed via the RIR's member portal giving easy access for creation and update of objects
  - Provided as part of the RIR's services to its members
- Operators who do not belong to any RIR generally use:
  - Their upstream transit provider's Routing Registry (if provided)
  - The RADB
    - https://www.radb.net
    - Note: Placing objects in the RADB requires an annual subscription fee

### Route Object: Purpose

- Documents which Autonomous System number is originating the route listed
- Required by many major transit providers
  - They build their customer and peer filter based on the routeobjects listed in the IRR
  - Referring to at least the 5 RIR routing registries and the RADB
  - Some operators run their own Routing Registry
    - May require their customers to place a Route Object there (if not using the 5 RIR or RADB versions of the IRR)

#### Route Object: Examples

202.144.128.0/20 route: DRUKNET-BLOCK-A1 descr: country: BT notify: ioc@bt.bt mnt-by: MAINT-BT-DRUKNET origin: AS18024 last-modified: 2018-09-18T09:37:40Z APNIC source:

This declares that AS18024 is the origin of 202.144.128.0/20

route6: 2405:D000::/32 descr: DRUKNET-IPV6-BLOCK origin: AS17660 notify: netops@bt.bt mnt-by: MAINT-BT-DRUKNET last-modified: 2010-07-21T03:46:02Z source: APNIC

This declares that AS17660 is the origin of 2405:D000::/32

### AS Object: Purpose

- Documents peering policy with other Autonomous Systems
  - Lists network information
  - Lists contact information
  - Lists routes announced to neighbouring autonomous systems
  - Lists routes accepted from neighbouring autonomous systems
- Some operators pay close attention to what is contained in the AS Object
  - Some configure their border router BGP policy based on what is listed in the AS Object

### AS Object: Example

aut-num: as-name:	AS17660 DRUKNET-AS	
descr:	DrukNet ISP, Bhutan Telecom, Thimphu	
country:	BT	
org:	ORG-BTL2-AP	
import:	<pre>from AS6461 action pref=100; accept 2</pre>	ANY
export:	to AS6461 announce AS-DRUKNET-TRANSIT	
import:	from AS2914 action pref=150; accept 2	ANY
export:	to AS2914 announce AS-DRUKNET-TRANSIT	▼
<snip></snip>		
import:	from AS135666 action pref=250; accept AS	135666
export:	to AS135666 announce {0.0.0.0/0} AS-DRUK	INET-TRANSIT
admin-c:	DNO1-AP	
tech-c:	DNO1-AP	Examples of inbound and
notify:	netops@bt.bt	
mnt-irt:	IRT-BTTELECOM-BT	outbound policies – RPSL
mnt-by:	APNIC-HM	
mnt-lower:	MAINT-BT-DRUKNET	
mnt-routes:	MAINT-BT-DRUKNET	
last-modified:	2019-06-09T22:40:10Z	79
source:	APNIC	

### AS-Set: Purpose

- The AS-Set is used by network operators to group AS numbers they provide transit for in an easier to manage form
  - Convenient for more complicated policy declarations
  - Used mostly by network operators who build their EBGP filters from their IRR entries
  - Commonly used at Internet Exchange Points to handle large numbers of peers

#### AS-Set: Example

as-set:	AS-DRUKNET-TRANSIT
descr:	DrukNet transit networks
members:	AS17660
members:	AS38004
members:	AS132232
members:	AS134715
members:	AS135666
members:	AS137925
members:	AS59219
members:	AS18024
members:	AS18025
members:	AS137994
admin-c:	DNO1-AP
tech-c:	DNO1-AP
notify:	netops@bt.bt
mnt-by:	MAINT-BT-DRUKNET
last-modified:	2019-01-15T08:51:21Z
source:	APNIC

Lists all the autonomous systems within the AS-DRUKNET-TRANSIT group

#### Summary

#### PeeringDB

- An industry Best Practice so that:
  - Network operators can promote the interconnects they participate in and attract more peering partners

#### IXPDB

- An industry Best Practice so that:
  - Internet Exchange Points can show their participants and help make the interconnect more attractive for potential participants

#### IRR

- An industry Best Practice:
  - So that network operators can document which autonomous system is originating their prefixes
  - Used by network operators to filter prefixes received from their customers and peers

# Route Origin Authorisation

#### Steps to securing the Routing System

#### Route Origin Authorisation

Essential first step to secure the global routing system
 Covered in detail in separate presentation slide deck:

http://www.bgp4all.com.au/pfs/\_media/workshops/02-rpki.pdf

# Configuration Tips

Of passwords, tricks and templates

### IBGP and IGPs Reminder!

- Make sure loopback is configured on router
  - IBGP between loopbacks, NOT real interfaces
- Make sure IGP carries loopback IPv4 /32 and IPv6 /128 address
- Consider the DMZ nets:
  - Use unnumbered interfaces?
  - Use next-hop-self on IBGP neighbours
  - Or carry the DMZ IPv4 /30s and IPv6 /127s in the IBGP
  - Basically, keep the DMZ nets out of the IGP!

#### IBGP: Next-hop-self

- BGP speaker announces external network to IBGP peers using router's local address (loopback) as next-hop
- Used by many ISPs on edge routers
  - Preferable to carrying DMZ point-to-point link addresses in the IGP
  - Reduces size of IGP to just core infrastructure
  - Alternative to using unnumbered interfaces
  - Helps scale network
  - Many ISPs consider this "best practice"

### Limiting AS Path Length

- Some BGP implementations have problems with long AS\_PATHS
  - Memory corruption
  - Memory fragmentation
- Even using AS\_PATH prepends, it is not normal to see more than 20 ASNs in a typical AS\_PATH in the Internet Routing Table today
  - The Internet is around 5 ASes deep on average
  - Largest AS\_PATH is usually 16-20 ASNs

```
neighbor x.x.x.x maxas-limit 20
```

#### Limiting AS Path Length

#### Some announcements have ridiculous lengths of AS-paths

This example is an error in one IPv6 implementation

\*> 3FFE:1600::/24 22 11537 145 12199 10318 10566 13193 1930 2200 3425 293 5609 5430
13285 6939 14277 1849 33 15589 25336 6830 8002 2042 7610 i

#### This example shows 100 prepends (for no obvious reason)

\*>i193.105.15.0 2516 3257 50404 5040

If your implementation supports it, consider limiting the maximum AS-path length you will accept

### BGP Maximum Prefix Tracking

- Allow configuration of the maximum number of prefixes a BGP router will receive from a peer
- Two level control:
  - Warning threshold: log warning message
  - Maximum: tear down the BGP peering, manual intervention required to restart neighbor <x.x.x.x> maximum-prefix <max> [restart N] [<threshold>] [warning-only]
- restart is an optional keyword which will restart the BGP session N minutes after being torn down
- threshold is an optional parameter between 1 to 100
  - Specify the percentage of <max> that will cause a warning message to be generated. Default is 75%.
- warning-only is an optional keyword which allows log messages to be generated but peering session will not be torn down

### Private-AS – Application


 A network operator with endsites multihomed on their backbone (RFC2270)

#### or

 A corporate network with several regions but connections to the Internet only in the core

#### or

Within a BGP Confederation

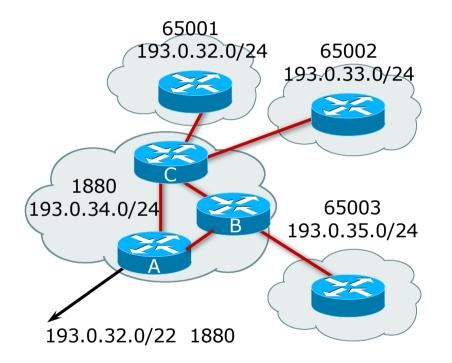

#### Private-AS – Removal

- Private ASNs MUST be removed from all prefixes announced to the public Internet
  - Include configuration to remove private ASNs in the EBGP template
- As with RFC1918 address space, private ASNs are intended for internal use
  - They must not be leaked to or used on the public Internet


Cisco IOS

```
neighbor x.x.x.x remove-private-AS
```

#### BGP TTL "hack"

#### Implement RFC5082 on BGP peerings

- (Generalised TTL Security Mechanism)
- Neighbour sets TTL to 255
- Local router expects TTL of incoming BGP packets to be 254
- No one apart from directly attached devices can send BGP packets which arrive with TTL of 254, so any possible attack by a remote miscreant is dropped due to TTL mismatch

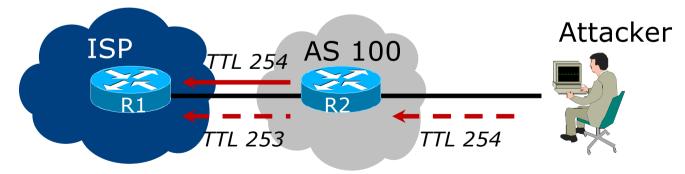

### BGP TTL "hack"

#### □ TTL Hack:

- Both neighbours must agree to use the feature
- TTL check is much easier to perform than MD5
- (Called BTSH BGP TTL Security Hack)
- Provides "security" for BGP sessions
  - In addition to packet filters of course
  - MD5 should still be used for messages which slip through the TTL hack
  - See

https://www.nanog.org/meetings/nanog27/presentations/meyer.pdf for more details

#### BGP TTL "hack"

#### Configuration example:

neighbor 100.121.0.2 ttl-security hops 1

#### BGP neighbour status:

Router# sh ip bgp neigh 100.121.0.2
...
Mininum incoming TTL 254, Outgoing TTL 255
Local host: 100.121.0.1, Local port: 41103
Foreign host: 100.121.0.2, Foreign port: 179

The neighbour must set the same configuration

If they don't, the BGP session will not come up

### Templates

Good practice to configure templates for everything

- Vendor defaults tend not to be optimal or even very useful for ISPs
- ISPs create their own defaults by using configuration templates

#### EBGP and IBGP examples follow

Also see Team Cymru's BGP templates

http://www.team-cymru.com/community-services.html

## IBGP Template Example

- IBGP between loopbacks!
- Next-hop-self
  - Keep DMZ and external point-to-point out of IGP
- Always send communities in IBGP
  - Otherwise BGP policy accidents will happen
  - (Default on some vendor implementations, optional on others)
- Hardwire BGP to version 4
  - Yes, this is being paranoid!
  - Prevents accidental configuration of BGP version 3 which is still supported in some implementations

### IBGP Template Example continued

#### Use passwords on IBGP session

- Not being paranoid, VERY necessary
- It's a secret shared between you and your peer
- If arriving packets don't have the correct MD5 hash, they are ignored
- Helps defeat miscreants who wish to attack BGP sessions
- Powerful preventative tool, especially when combined with filters and the TTL "hack"

## EBGP Template Example

- BGP damping
  - Do NOT use it unless you understand the impact
  - Do NOT use the vendor defaults without thinking
- Cisco's Soft Reconfiguration
  - Do NOT use unless troubleshooting it will consume considerable amounts of extra memory for BGP
- Remove private ASNs from announcements
  - Common omission today
- Use extensive filters, with "backup"
  - Use AS-path filters to backup prefix filters
  - Keep policy language for implementing policy, rather than basic filtering

### EBGP Template Example continued

- Use password agreed between you and peer on EBGP session
- Use maximum-prefix tracking
  - Router will warn you if there are sudden increases in BGP table size, bringing down EBGP if desired
- Limit maximum as-path length inbound
- Log changes of neighbour state
  - ...and monitor those logs!
- Make BGP admin distance higher than that of any IGP
  - Otherwise, prefixes heard from outside your network could override your IGP!!

# Mutually Agreed Norms for Routing Security

Industry Best Practices to ensure Security of the Routing System



### Routing Security

#### Implement the recommendations in https://www.manrs.org

- Prevent propagation of incorrect routing information
   Filter BGP peers, in & out!
- 2. Prevent traffic with spoofed source addresses
   > BCP38 Unicast Reverse Path Forwarding
- 3. Facilitate communication between network operators
  - » NOC to NOC Communication
  - > Up-to-date details in Route and AS Objects, and PeeringDB
- 4. Facilitate validation of routing information
  - » Route Origin Authorisation using RPKI



### MANRS 1)

#### Filtering prefixes inbound and outbound

RFC8212 requires all EBGP implementations to reject prefixes received and announced in the absence of any policy

Advice: Never set up an EBGP session without inbound and outbound prefix filters

If full table required, block at least the bogons (see earlier)

#### MANRS 2)

- □ Implementing BCP 38
  - Unicast Reverse Path Forwarding
  - (Deny outbound traffic from customers which has spoofed source addresses)
- Advice: implement uRPF on all single-homed customer facing interfaces
  - Cheaper (CPU & RAM) than implementing packet filters

### MANRS 3)

#### Facilitate NOC to NOC communication

- Know the direct NOC contacts for your customer Network Operators, your peer Network Operators, and your upstream Network Operators
- This is not calling their "customer support line"
- Make sure NOC contact info is part of any service contract
- Up to date info in Route and AS Objects
- Up to date AS info in PeeringDB

Advice: NOC contact info for all connected Autonomous Networks is known to your NOC

#### MANRS 4)

#### Facilitate validation of Routing Information

- RPKI and Route Origin Authorisation (ROA)
- All routes originated need to be signed to indicate that your AS is authorised to originate these routes
   Helps secure the global routing system

#### Advice: Sign ROAs for all originated routes using RPKI

- And make sure all customer originated routes are also signed
- Validate received routes from all peers
  - High priority for validated routes
  - Discard invalid routes
  - Low priority for unsigned routes

### MANRS summary

- If your organisation supports and implements all 4 techniques in your network
  - Then join MANRS
  - https://www.manrs.org/join/



MANRS for Operators
 MANRS for IXPs
 MANRS for CDN & Cloud Providers

#### Summary

- Use configuration templates
- Standardise the configuration
- Be aware of standard "tricks" to avoid compromise of the BGP session
- Anything to make your life easier, network less prone to errors, network more likely to scale
- Implement the four fundamentals of MANRS
- It's all about scaling if your network won't scale, then it won't be successful

## BGP Best Current Practices

**ISP** Workshops